

UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
FKI26

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

IMPROVED METHOD AND MULTI-PURPOSE APPARATUS FOR DISPENSING AND CIRCULATING FLUID IN WELLBORE CASING

and invented by:

Donald E. Mosing
Samuel P. Hawkins
David L. Sipos
Keith T. Lutgring

Burney J. Latiolais, Jr.

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 08/850,496

Which is a:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 08/726,112

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: 5,735,348

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 340 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
FKI26

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 9
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EH865966899US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
FKI26

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	30	- 20 =	10	x \$18.00	\$180.00
Indep. Claims	4	- 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,018.00

- ☒ A check in the amount of **\$911.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **13-2166** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Henry L. Ehrlich
Reg. No. 39,663
Matthews, Joseph, Shaddox & Mason P.L.L.C.
P.O. Box 572957
Houston, Texas 77257-2957
(713) 781-9595-Telephone
(713) 781-9274-Telecopier

Dated: **8 December 1998**

CC:

**TRANSMITTAL LETTER
(General - Patent Pending)**

Docket No.
FKI26

In Re Application Of: **Donald E. Mosing et al**

Serial No.

Filing Date

Examiner

Group Art Unit

Title: **IMPROVED METHOD AND MULTI-PURPOSE APPARATUS FOR DISPENSING AND CIRCULATING
FLUID IN WELLBORE CASING**

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is:

Patent Application Transmittal

Declaration and Power of Attorney; Assignment of Invention

Petition to Make Special Because of Applicant's Age; Declaration in Support of Petition to Make Special Because of Applicant's Age

Certificate of Express Mail Label # EH865966899US

in the above identified application.

- ☐ No additional fee is required.
- ☒ A check in the amount of **\$1,018.00** is attached.
- ☒ The Assistant Commissioner is hereby authorized to charge and credit Deposit Account No. **13-2166** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of
- ☒ Credit any overpayment.
- ☒ Charge any additional fee required.

Henry L Ehrlich
Signature

Dated: *8* December 1998

Henry L. Ehrlich
Reg. No. 39,663
Matthews, Joseph, Shaddox & Mason, P.L.L.C.
P.O. Box 572957
Houston, Texas 77257-2957
(713) 781-9595- Telephone
(713) 781-9274 - Telecopier

I certify that this document and fee is being deposited on _____ with the U.S. Postal Service as first class mail under 37 C.F.R. 1.8 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Signature of Person Mailing Correspondence

Typed or Printed Name of Person Mailing Correspondence

CC: *check # 1024 - 1018.00*
check # 10200 - 911.00 *check # 10238 - 410.00*

5 **IMPROVED METHOD AND MULTI-PURPOSE APPARATUS FOR
DISPENSING AND CIRCULATING FLUID IN WELLBORE CASING**

 This a continuation-in-part application of co-pending application Serial No. 08/850,496,
filed 2 May 1997, a continuation-in-part of Serial No. 08/726,112, filed 4 October 1996, now U.S.
10 Patent 5,735,348, issued 7 April 1998. The prior applications are hereby incorporated herein by
reference.

FIELD OF INVENTION

 This invention relates generally to equipment used in the drilling and completion of
subterranean wells, and more specifically to the filling and circulating of drilling fluids in a casing
15 string as well as pumping cement into the casing to set the casing within the wellbore.

BACKGROUND

 The process of drilling subterranean wells to recover oil and gas from reservoirs, consists
of boring a hole in the earth down to the petroleum accumulation and installing pipe from the
reservoir to the surface. Casing is a protective pipe liner within the wellbore that is cemented in
20 place to insure a pressure-tight connection to the oil and gas reservoir. The casing is run a single
joint at a time as it is lowered into the wellbore. On occasion, the casing becomes stuck and is
unable to be lowered into the wellbore. When this occurs, load or weight must be added to the
casing string to force the casing into the wellbore, or drilling fluid must be circulated down the
inside diameter of the casing and out of the casing into the annulus in order to free the casing from
25 the wellbore. To accomplish this, it has traditionally been the case that special rigging be installed
to add axial load to the casing string or to facilitate circulating the drilling fluid.

 When running casing, drilling fluid is added to each section as it is run into the well. This
procedure is necessary to prevent the casing from collapsing due to high pressures within the

5 wellbore. The drilling fluid acts as a lubricant which facilitates lowering the casing within the wellbore. As each joint of casing is added to the string, drilling fluid is displaced from the wellbore. The prior art discloses hose assemblies, housings coupled to the uppermost portion of the casing, and tools suspended from the drill hook for filling the casing. These prior art devices and assemblies have been labor intensive to install, required multiple such devices for multiple casing string sizes, have not adequately minimized loss of drilling fluid, and have not been multi-
10 purpose. Further, disengagement of the prior art devices from the inside of the casing has been problematic, resulting in damage to the tool, increased downtime, loss of drilling fluid, and injury to personnel.

The normal sequence for running casing involves suspending the casing from a top drive
15 or non-top drive (conventional rotary rig) and lowering the casing into the wellbore, filling each joint of casing with drilling fluid. The filling of each joint or stand of casing as it is run into the hole is the fill-up process. Lowering the casing into the wellbore is facilitated by alternately engaging and disengaging elevator slips and spider slips with the casing string in a stepwise fashion, facilitating the connection of an additional stand of casing to the top of the casing string
20 as it is run into the hole.

Circulation of the fluid is sometimes necessary if resistance is encountered as the casing is lowered into the wellbore, preventing the running of the casing string into the hole. This resistance to running the casing into the hole may be due to such factors as drill cuttings, mud cake, or surface tension formed or trapped within the annulus between the well bore and the
25 outside diameter of the casing, or caving of the wellbore among other factors. In order to circulate the drilling fluid, the top of the casing must be sealed so that the casing may be pressurized with drilling fluid. Since the casing is under pressure the integrity of the seal is critical

5 to safe operation, and to minimize the loss of expensive drilling fluid. Once the obstruction is removed the casing may be run into the hole as before.

Once the casing reaches the bottom, circulating of the drilling fluid is again necessary to test the surface piping system, to condition the drilling fluid in the hole, and to flush out wall cake and cuttings from the hole. Circulating is continued until at least an amount of drilling fluid equal
10 to the volume of the inside diameter of the casing has been displaced from the casing and wellbore. After the drilling fluid has been adequately circulated, the casing may be cemented in place.

On jobs which utilize a side door elevator, the casing is simply suspended from a shoulder on the elevator by the casing collar. Thus, fill-up and circulation tools with friction fit sealing elements such as packer cups, and other elastomeric friction fit devices must repeatedly be inserted
15 and removed because of the overall length requirements of the tool. This repeated insertion will, over time, result in the wearing of the elastomeric sealing element such that it will no longer automatically seal on insertion. An adjustable extension is disclosed, which allows the fill-up and circulation tool to be retracted to prevent the elastomeric seal from being inserted into the casing during the fill-up process.

20 Circulation alone may be insufficient at times to free a casing string from an obstruction. The prior art discloses that the fill-up and circulation tools must be rigged down in order to install tool assemblies to attach to the rig to allow the string to be rotated and reciprocated. This process requires manual labor, inherent in which is the possibility of injury or loss of life, and results in rig downtime. The potential for injury and lost rig time is a significant monetary concern in drilling
25 operations. To eliminate this hazard and minimize lost rig time, a method and apparatus is disclosed, which allows the fill-up and circulation tool to remain rigged up while at the same time allowing the casing to be rotated and reciprocated.

5 After the casing has been run to the desired depth it may be cemented within the wellbore. The purpose of cementing the casing is to seal the casing to the wellbore formation. In order to cement the casing within the wellbore, the assembly to fill and circulate drilling fluid is generally removed from the drilling rig and a cementing head apparatus installed. This process is time consuming, requires significant manpower, and subjects the rig crew to potential injury when
10 handling and installing the additional equipment flush the mud out with water prior to the cementing step. A special cementing head or plug container is installed on the top portion of the casing being held in place by the elevator. The cementing head includes connections for the discharge line of the cement pumps, and typically includes a bottom wiper plug and a top wiper plug. Since the casing and wellbore are full of drilling fluid, it is first necessary to inject a spacer
15 fluid to segregate the drilling fluid from the cement to follow. The cementing plugs are used to wipe the inside diameter of the casing and serves to separate the drilling fluid from the cement, as the cement is carried down the casing string. Once the calculated volume of cement required to fill the annulus has been pumped, the top plug is released from the cementing head. Drilling fluid or some other suitable fluid is then pumped in behind the top plug, thus transporting both plugs
20 and the cement contained between the plugs to an apparatus at the bottom of the casing known as a float collar. Once the bottom plug seals the bottom of the casing, the pump pressure increases, which ruptures a diaphragm in the bottom of the plug. This allows the calculated amount of cement to flow from the inside diameter of the casing to a certain level within the annulus being cemented. The annulus is the space within the wellbore between the ID of the
25 wellbore and the OD of the casing string. When the top plug comes in contact with the bottom plug, pump pressure increases, which indicates that the cementing process has been completed. Once the pressure is lowered inside the casing, a special float collar check valve closes, which

5 keeps cement from flowing from the outside diameter of the casing back into the inside diameter of the casing.

The prior art discloses separate devices and assemblies for (1) filling and circulating drilling fluid, and (2) cementing operations. The prior art devices for filling and circulating drilling fluid disclose a packer tube, which requires a separate activation step once the tool is positioned within
10 the casing. The packer tubes are known in the art to be subject to malfunction due to plugging, leaks, and the like, which lead to downtime. Since each step in the well drilling process is potentially dangerous, time consuming, labor intensive and therefore expensive, there remains a need in the art to minimize any down time. There also remains a need in the art to minimize tool change out and the installation of component pieces.

15 Therefore, there remains a need in the drilling of subterranean wells for a tool which can be used for drilling fluid, filling and circulating, and for cementing operations.

For the foregoing reasons, there is a need for a drilling fluid filling, circulating, and cementing tool which can be installed quickly during drilling operations.

For the foregoing reasons, there is a need for a drilling fluid filling, circulating, and
20 cementing tool which seals against the inside diameter of a casing having a self-energizing feature.

For the foregoing reasons, there is a need for a drilling fluid filling, circulating, and cementing tool which minimizes the waste of drilling fluids and allows for the controlled depressurization of the system.

For the foregoing reasons, there is a need for a drilling fluid filling, circulating, and
25 cementing tool which may be used for every casing size.

For the foregoing reasons, there is a need for a drilling fluid filling, circulating, and cementing tool which submits additional axial loads to be added to the casing string when

5 necessary.

For the foregoing reasons, there is a need for a drilling fluid filling, circulating, and cementing tool which is readily adjustable in length such that damage to the sealing element is minimized.

For the foregoing reasons, there is a need for a fill-up and circulating tool which may be
 10 sealingly coupled to a casing string to allow the string to be rotated and reciprocated into the wellbore.

SUMMARY

The present invention is directed to a method and apparatus that satisfies the
 15 aforementioned needs. A drilling fluid filling, circulating and cementing tool having features of the present invention may be utilized on rigs with top drive drilling systems and conventional rotary type rig configurations. The tool may be quickly and easily installed in a top drive or a rotary type rig arrangement. The fill-up and circulating tool of the present invention includes a mandrel having a central axial bore extending therethrough. A top sub assembly which includes
 20 a series of threaded couplings and spacers that may be threadedly connected to the upper end of the mandrel to provide proper spacing of the tool within the rigging apparatus. The lowermost portion of the mandrel may include a plurality of apertures which allows drilling fluid to flow from the bore and through the apertures during drilling fluid circulating. A lock sleeve is disposed about the outside diameter of the mandrel, and is positioned to cover the mandrel apertures during the
 25 fill-up mode of operation. A retaining spring may be disposed on the outside diameter of the mandrel to bias the lock sleeve between the fill up and circulating positions. An inverted packer cup may be fixedly connected at one end to the outside diameter of the lock sleeve. The opposite

5 end of the cup extends radially outward and away from the outside diameter of the lock sleeve and is adapted to automatically seal against the inside diameter of the casing string when the cup is inserted into the casing. A mud saver valve and nozzle assembly may be connected to the lower end of the mandrel. The mud saver valve is actuated to the open position by increased fluid pressure from above and regulates the flow of fluid from the tool. A nozzle may be attached to
10 the outlet of the mud saver valve to facilitate entry of the tool into the top of the casing string. This configuration is commonly used in a top drive configuration. When the tool is used in a rotary type configuration, a bayonet adapter may be installed on the inlet of the mandrel and is adapted such that fluid may be pumped directly to the tool. The tool may also be configured in a cementing and drilling fluid fill up and circulating arrangement. The cementing and drilling fluid
15 fill up and circulating arrangement includes a cementing head assembly connected to the top of the mandrel. This configuration allows the tool to first be used for drilling fluid fill up and circulating, and then by simply removing the mud saver valve and nozzle and installing the cement wiper plug assembly, common cementing operations may begin for cementing the casing in place. The fill-up and circulating tool of the present invention as well as other such tools, which are capable of being
20 inserted into casing may be configured with a push plate assembly to transfer the weight of the rotary rig assembly and/or top drive to the casing string in order to force the string into the wellbore.

According to the method of the present invention, when the assembly is utilized for drilling fluid fill up within the casing string, the assembly is first installed on the top drive or rotary type
25 unit and then positioned above the casing to be filled. In one embodiment, the assembly is then lowered until the hose extension is inside of the upper end of the casing string, without engaging the sealing cup with the inside of the casing. In this position the lowermost portion of the mandrel

5 maybe covered by the lock sleeve. The drilling fluid pumps may then be started, which causes the drilling fluid to flow through the assembly and upon generating sufficient fluid pressure will flow through the mud saver valve and out of the nozzle into the casing.

10 If a side door elevator is used to raise and lower the casing, full-up and circulation tools which utilize packer cups or other elastomeric friction fit devices must repeatedly be inserted and removed because of the overall length requirements of the tool. A side door elevator is generally used when relatively short strings of casing are being run. The side door elevator does not have slips to engage with the casing string. The side door elevator in the open positions lowered axially over the upper end of the casing string such that the elevator shoulder is underneath the casing collar. The side door elevator is then closed and the top of the side door elevator shoulder is engaged against the bottom surface of the casing collar thereby suspending the casing string from the side door elevator. The problem associated with the use of this type of elevator is the reduced life of the packer cup or elastomeric friction fit sealing device due to wearing against the inside diameter of the casing string. Since the side door elevator is close coupled with the casing collar, due to the required spacing of the fill-up and circulating tool, the packer cup or elastomeric sealing device is always inserted into the casing whether in the fill-up or circulating mode as each joint of casing is added to the string, resulting in repeated frictional engagement of the sealing device with the smaller inside diameter of the casing string.

25 The packer, whether a cup or other elastomeric device, wearing problem also occurs when the fill-up and circulation tools is in the tandem configuration. The tandem configuration comprises the use of two different sizes of packer cups or elastomeric sealing devices on a single fill-up and circulation tool to allow different casing sizes to be run without stopping to re-tool. The normal spacing of the tool in the fill-up mode is to position the tool such that the packer is

5 approximately one (1) foot above the top of the casing string. This is not a problem when running smaller casing since both packer cups or elastomeric devices are above the casing. However, when larger diameter casing is run, the lower (smaller diameter) packer cup or elastomeric device is inserted into the casing string such that the upper (larger diameter) packer cup or elastomeric device is approximately 1 foot above the top of the casing string.

10 The present invention solves the problems associated with the repeated insertion of a packer cup or elastomeric sealing device into the casing string. An adjustable extension for the fill-up and circulation tool is included, which allows the tool to be retracted to a length such that the sealing devices remain above and outside of the casing string during the fill-up step.

15 To begin the drilling fluid circulation mode, the assembly is lowered further into the casing string to cause the sealing element to automatically engage and seal against the inside diameter of the casing, which generally fixes the sealing device cup and sliding sleeve in place with respect to the casing. Further lowering of the assembly causes the mandrel to move axially downward resulting in the mandrel apertures being exposed from the sliding sleeve. On sufficient fluid pressure from the pumps, fluid exits from the tool into the casing through the apertures and
20 through the nozzle. Continued flow of fluid through the tool and into the casing pressurizes the drilling fluid and on sufficient pressurization causes the fluid to circulate from the inside diameter of the casing into and out of the annulus to free or dislodge the casing from the wellbore.

On occasion circulation alone will not suffice to get past a down hole obstruction. Under these circumstances rotation of the casing string, and/or reciprocation of the casing string may be
25 required to "spud" the casing into the hole. The prior art fill-up and circulation tools had to be rigged down to allow a pup piece or other similar means to be attached to the top drive rig or rotary sub to allow the string to be reciprocated and rotated past the obstruction. The rigging of

5 the fill-up and circulating tools down and up again as well as rigging up and down with the pup
piece consumes considerable man-hours and rig time. The present invention offers a solution to
this problem. A torque sub in combination with the fill-up and circulation tool is provided, which
allows the operator to simply make-up with the coupling on the upper end of the casing with the
fill-up and circulation tool remaining connected to the top drive (or rotary sub). To make-up with
10 the casing, the spider slips are engaged against the casing fixing it in position. The elevator slips
are disengaged from the casing and the top drive unit is lowered axially over the upper end of the
casing to allow the threads on the torque coupling to engage with the threads on the casing
coupling. The top drive is simply actuated to rotate the fill-up and circulation tool until the torque
sub is threadedly connected to the casing coupling. The operator may not pick-up on the casing
15 string to disengage the spider slips. By placing the weight of the top drive onto the casing, the
entire string can then be rotated and reciprocated. The casing can then be lowered further into the
wellbore. Once the casing is lowered such that the elevator is in contact with the spider, the bails
can be disconnected to allow the top sub to lower the casing even further into the wellbore. The
spider slips are then engaged against the casing to fix it at the rig floor. The top drive is simply
20 reversed to disengage the torque sub from the casing coupling, and the bails may be reconnected
to the elevator, or if further reciprocation is necessary left uncoupled. Now another joint of casing
can be picked up to make up the joint with the casing.

When the casing is run to the desired depth and drilling fluid filling and circulation is no
longer required, the assembly may be configured for the cementing process. The drilling fluid lines
25 are disconnected and replaced with the cement pump lines. After the drilling fluid flow is stopped,
the apparatus is withdrawn from the casing to expose the mud saver valve and hose extension
assembly. The mud saver valve and hose extension assembly may be simply uncoupled from the

5 lower body of the apparatus and the cement wiper plug assembly installed. The apparatus with the cement plug assembly and cement pump lines installed is then lowered back into the casing. Once the sealing device is automatically engaged with the casing the cementing process begins. The plug release mechanism may be initiated at the appropriate times during the cementing process to release the cement wiper plugs.

10 The fill up and circulating tool of the present invention may include a mandrel having an axial bore formed therethrough, a sealing element disposed about the mandrel, and a pressure relief housing functionally connected with the mandrel for allowing fluid to flow from the casing into the tool when the pressure in the casing is greater than the pressure in the axial bore. The pressure relief housing may include a lateral port or aperture formed therethrough. The relief housing may further include a blocking mechanism for such as an elastomeric member or ball and seat for 15 allowing fluid to flow into the tool from the wellbore and preventing fluid flow through the port into the wellbore.

The present invention may be utilized on top-drive and rotary type rigs. Unlike the prior art devices, this invention permits the same basic tool to be utilized for all casing diameters. The only difference is in the choice of sealing device assembly diameters. Thus, the necessity of having 20 multiple tools on hand for multiple casing diameters is eliminated. This feature is much safer, saves rigging time as well as equipment rental costs for each casing installation. The same basic assembly may be used for cementing the casing within the wellbore, saving again on rigging time and equipment rental. In addition, the assembly may be configured for drilling fluid fill up and circulating only. The prior art does not disclose a single assembly, which may be employed to fill- 25 up and circulate drilling fluid, pressure test casing, and fill-up and circulate cement to set the casing in place.

5

BRIEF DESCRIPTION OF THE DRAWINGS

- Figure 1 Shows a top drive rig assembly in accordance with the present invention.
- Figure 2 Shows a conventional rotary rig assembly used in accordance with the present invention.
- 10 Figure 3 Shows a side view of the torque sub and the adjustable extension.
- Figure 3a Shows a side view of the fill up and circulating tool in the fill-up mode and configured for a top drive rig assembly.
- 15 Figure 4 Shows a side view of the fill up and circulating tool in the fill-up mode and configured for a conventional rotary rig assembly.
- Figure 5 Shows a side view of the fill up and circulating tool in the cementing mode and configured for a top drive rig assembly.
- 20 Figure 6 Shows a side view of the fill up and circulating tool configured with the push plate assembly.
- 25 Figure 7 Is a partial, cross-sectional view of another embodiment of a fill up and circulating tool having a pressure relief housing.
- Figure 8 Is a partial, cross-sectional view of the pressure relief housing of Figure 7.
- 30 Figure 9 Is a partial, cross-sectional view of the pressure relief housing of Figure 7.

DESCRIPTION

Figure 1 shows a top drive drilling rig 3. Figure 1 also shows the casing fill up and circulator tool 46 in the top drive configuration, which is more fully described below. Those skilled in the art will know that suspended from the traveling block 1 on a drilling rig is a hook 2. The top drive unit 3 is suspended from the hook 2. Pressurized fluid is delivered from the drilling fluid pumps 8 through hose 4 directly to the top drive unit 3. A top sub box connection assembly 6 is threadedly connected at one end to the top drive pin shoulder 5 to receive the fill up and circulating tool 46. The opposite end of the top sub box connection assembly is threadedly connected to the casing fill up and circulating tool 46. A tool catch plate 7 may be fixed to the top

5 sub box connection assembly 6 as a stop which will engage against the uppermost portion of the casing if the tool becomes disengaged from the top drive unit 3. An elevator 14 is suspended from bails 3a and 3b attached to the top drive unit 3. It should be obvious to one skilled in the art that a joint of casing 32 may be positioned under the top drive unit so as to allow the upper end of the casing to be gripped by the elevator 14, thereby inserting the fill up and circulating tool 46 partially
10 inside of the casing 32. The casing 32, suspended from the elevator 14 may then be lowered through the rotary table slips 10 on the drilling rig floor and rotary table 11 below the rig floor and into the wellbore 12. As the casing 32 is being lowered it may be filled with drilling fluid from the fill up and circulating tool 46, the full operation of which is more fully described below. Once the casing 32 is lowered such that the elevator 14 is almost in contact with the rotary table slips 10,
15 the slips 10 are then engaged against the casing 32 to hold it in position above the rig floor to receive the next joint of casing 32. The procedure is repeated until the entire casing string has been lowered into the wellbore 12.

Figure 2 is illustrative of a conventional drilling rig with a rotary type rig assembly with the casing circulating tool installed 46. Those skilled in the art will know that suspended from the traveling block on a rotary type rig configuration is a hook 2. The hook 2 includes two ears 2a
20 and 2b, located on either side of the hook 2, and are used to suspend a pair of bails 13a and 13b and an elevator 14 below. The lower end of the bails 13a and 13b are connected to the ears 14a and 14b of the elevator 14. The hook 2, also suspends a guide plate 15 connected by a U-bolt 16, which is secured to the guide plate 15 with nuts 16a and 16b. The U-bolt 16 extends through
25 apertures 15c and 15d in the guide plate 15. The bails 13a and 13b extend through two apertures 15a and 15b in the guide plate 15 such that horizontal movement of the bails 13a and 13b, the elevator 14, and the fill up and circulating tool 46 is limited. The lock block 18 having a central

axial bore is welded at one end to the bottom surface 15e of the guide plate 15. The lock block 18 includes at least one aperture 18a extending through the wall of the lock block 18 to receive spring pin 18b. Spring pin 18b is adapted to releasably extend through the lock block aperture 18a and to engage the channel 17a in the upper end of the bayonet adapter 17 on the fill-up and circulating tool 46. The spring pin 18b is inserted through the aperture 18 and into the channel 17a to retain the bayonet adapter 18 within the lock block 18 thereby suspending the fill-up and circulating tool 46 from the guide plate 15. To deliver fluid to the casing, the drilling fluid pump 8 is activated which discharges drilling fluid into hose 4, and into the fill-up and circulating tool through the nozzle 17b on the bayonet adapter 17, which transports the drilling fluid to the fill-up and circulating tool 46 and into the casing 32. Alternative embodiments of the lock block and bayonet adapter are contemplated by the present invention. For example, lock block 18 comprises a cylinder with internal threads and the bayonet adapter with a male threaded end so as to be threadedly connect to the lock block. In a second alternative embodiment, lock block 18 comprises a cylinder with two apertures extending through the wall of the cylinder 180° apart with the cylinder having an outside diameter slightly smaller than the inside diameter of the lock block. The upper end of the bayonet adapter is inserted inside the lock block with the apertures in alignment. A pin would then be inserted through the apertures to retain the bayonet adapter and therefore the fill-up and circulation tool.

Figure 3 is illustrative of a torque sub 70 and a rotational sub 80, both or either of which may be used in combination with any fill-up and circulation tool inerrable within a casing string in either a top drive or conventional rotary rig configuration. The torque sub 70, the operation and benefits of which are described above, includes three primary components, a top sub 71, a lock sub 72 and a thread adapter 73. The inlet of top sub 71 is threadedly connected to the top drive

3 (or rotary sub if a conventional rotary rig is used). The outlet of the top sub 71 is threadedly connected to the inlet of lock sub 72. The outlet of lock sub 72 may then be connected directly to the fill-up and circulation tool selected, or it may be connected to the adjustable extension 80. The outlet of top sub 71 also includes O-ring 71a which provides a fluid tight seal against the inlet of lock sub 72. Disposed about the lower outer surface of the top sub 71 and the upper outer surface of the lock sub 72 is thread adapter 73. Thread adapter 73 includes external threads 73a, which allows the assembly to be threadedly connected to the internal threads of a casing coupling. Thus, it will be obvious to one skilled in the art that the outside diameter of the thread adapter 73 varies with the inside diameter of the particular casing and therefore casing coupling used. Extending from the inside wall of the thread adapter is a shoulder 73b, which is in engaging contact with the outside wall on the outlet portion of the lock sub 72. Disposed within shoulder 73b is a O-ring 73c, which provides a fluid tight seal between thread adapter 73 and lock sub 72. Extending laterally through the wall of thread adapter 73, near its upper end, are pins 74. In the preferred embodiment, four (4) pins 74 are located approximate 90° apart. Pins 74 extend past the inside surface of the wall of thread adapter 73 and extend through a slot 71b in the lower end of top sub 71 such that the end of the pins 74 engage against the wall of the top sub. This fixes thread adapter 73 to top sub 71. It will now be obvious that as the assembly is rotated by top drive 3 (or rotary sub) to thread adapter 73 into the casing coupling, the assembly rotates as a unitary structure. After thread adapter 73 and the casing coupling have been made-up, elevator 14 and spider 10 (Figure 1 and 2) may be released allowing the entire casing string to be rotated and/or reciprocated within the wellbore. Since fill-up and circulation tool 46 is still attached, fluid circulation may be performed as well.

Figure 3 also shows the adjustable extension 80, the benefits and general operation of

5 which is described above. The adjustable extension 80 allows a fill-up and circulation tool of any design to be extended and retracted automatically via the top drive 3 (or a rotary sub) or manually by simply rotating the adjustable extension 80 in the desired direction. The adjustable extension 80 may be used in place of or in addition to the top sub assembly or pup piece typically used to space the particular fill-up and circulation tool out on the rig. The adjustable extension 80 includes

10 a lower adapter 84, a upper adapter 83, a screw mandrel 82, and a extension housing 81. The inlet of the upper adapter 83 includes threads to connect to a torque sub 70, a cement head assembly (see Figure 5), or may be connected to the top drive or rotary rig. The outlet of the upper adapter 83 is threadedly connected to the upper end of extension housing 81. An O-ring 83a is disposed within the lower outer wall of the outlet of the upper adapter 80 to provide a fluid tight seal

15 between the extension housing 81 and the upper adapter 83. The lower end of the extension housing 81 includes a shoulder 81a, after which threads 81b on the inside wall extend to the end of the extension housing 81. Threadedly connected to the lower end of the extension housing 81 is screw mandrel 82. The screw mandrel 82 includes threads 82a substantially along the length of the screw mandrel 82 so that when the extension assembly is rotated, the screw mandrel moves

20 axially within the extension housing 81 allowing the tool to be extended or retracted as the need arises. The upper end of the screw mandrel 82 includes a flange 82b, the lower portion of which engages against the shoulder 81a of the extension housing 82 to create a stop when the extension assembly 80 is fully extended. The upper portion of the flange 82b engages against the outlet of the upper adapter 83 to create a stop when the extension assembly 80 is fully retracted. Disposed

25 within the outer wall of the shoulder 81a are O-rings 82c, which provide a fluid tight seal between the screw mandrel 82 and the extension housing 81. Threadedly connected to the outlet of the screw mandrel 82 is the inlet of the lower adapter 84. Disposed within the inside wall of the inlet

5 of the lower adapter is an O-ring 84b, which provides a fluid tight seal between the screw mandrel 82 and lower adapter 84. The outlet of lower adapter 84 is threadedly connected to fill-up and circulation tool 46, the cement head assembly 47, the torque sub 70 or other related assembly as the circumstances dictate. At least one slot 84a is disposed in the outer wall of the lower adapter 84. In order to retract or extend the adjustable extension 80, a bar or other suitable member is
10 inserted into the slot and force is applied to the bar to extend or retract the adjustable extension 80 manually. In order to extend or retract the extension automatically, a bar or other suitable member of sufficient length to engage with the bails when rotated is inserted into the slot. Thus, it will be obvious to one skilled in the art that once the top drive 3 (or rotary sub) is activated to rotate, the bar will move along with the lower adapter 84 until the bar engages against the bail. Further rotation will cause the extension assembly 80 to be retracted or extended.

Figure 3a shows the preferred embodiment of fill-up and circulating tool 46 in the top drive configuration and in the fill-up position. Those who are skilled in the art will know and understand that each component in the flow path includes an inlet and an outlet. The tool consists of a mandrel 19, having a central axial bore defining a flow path 19a through which fluid flows
20 through the tool. A plurality of apertures 19c located near the outlet of mandrel 19 allow fluid to flow through apertures 19c during the circulating mode of tool 46 as more fully described below. To lengthen mandrel 19 to space out the tool in any desired length on the rig, a top sub assembly may be connected to the inlet of mandrel 19. The top sub assembly may consist of a top sub 20, a first spacer 21, a connector coupling 22, a second spacer 23, and a top collar 24 connected in
25 series thereby extending the overall length of the tool as well as the flow path 19a. Any number of couplings and spacers or length of spacer may be used to provide proper spacing on the top drive or conventional rotary rig configuration. Once the spacing requirements have been

5 determined, the top sub assembly is configured with top collar 24 connected to the inlet of mandrel 19.

A spring 25 is disposed about the outer surface 19b of mandrel 19. The upper end 25a of spring 25 is in engaging contact with and below lower surface 24a of top collar 24. A sliding sleeve 26 in engaging contact with the lower end 25b of the spring 25 is disposed about the outer
10 surface 19b of the mandrel 19. A spring stop 25c is disposed within the annular space between spring 25 and outer surface 19b of mandrel 19. Spring stop 25c is included to prevent spring 25 from being damaged from excessive compression. Spring 25 biases sliding sleeve 26 such that in the fill-up mode of tool 46, sliding sleeve 26 covers the mandrel apertures 19c, which results in fluid flow exclusively through the outlet of mandrel 19.

15 The upper end of sliding sleeve 26 includes a flange portion 26a, the upper surface of which is in engaging contact with lower end 25b of spring 25, and the lower surface of which is in engaging contact with a spacer ring 27. The lower surface of spacer ring 27 is in engaging contact with a thimble 28. Thimble 28 is adapted to retain the upper end 29a of the sealing element, packer cup 29 which may be any type of elastomeric sealing device, against and between
20 the lower surface of thimble 28 and the outer surface of sliding sleeve 26 near the upper end 26b. While packer cup 29 is shown as the preferred embodiment of the sealing element, any friction fit sealing device may be used, as well as other sealing devices such as inflatable packers and the like may be used in combination with the features and benefits of sliding sleeve 26 and the mandrel 19 described herein.

25 Spacer ring 27 minimizes the potential for deflection of thimble 28 when subjected to fluid pressure forcing packer cup 29 and thimble 28 upward and outward. A lock sleeve 30 is disposed about the sliding sleeve 26 and is connected to the lower end 26b of sliding sleeve 26. The upper

5 end 30a of lock sleeve 30 is in engaging contact with the upper end 29a of packer cup 29 to further retain packer cup 29 within thimble 28 and against the outer surface 26b of sliding sleeve 26. Packer cup 29 depends downward with respect to the upper end 29a of packer cup 29, flaring radially outward and away from sliding sleeve 26 such that it forms a cone which defines an annular space between the inside surface of packer cup 29 and sliding sleeve 26. The outside
10 diameter of the lower end 29b of packer cup 29 is at least equal to the inside diameter of casing 32. The lower end 29b is further adapted to be inserted into casing 32 and upon insertion to automatically engage with and to provide a leak tight seal against the inside diameter of casing 32. Packer cup 29 is formed from a flexible elastomeric material such as rubber, however other materials or combination of materials are contemplated by the present invention. For example, in
15 an alternative embodiment, the upper end 29a of packer cup 29 is made of steel while the lower end 29b is made of rubber or some other elastomer.

The outlet of mandrel 19 is connected to the inlet of a lower body 31. The lower body 31 limits the travel of sliding sleeve 26 downward. In the fill-up mode of tool 46, spring 25 biases sliding sleeve 26 downward such that the bottom surface of the sliding sleeve 26 is in engaging
20 contact with the top surface of lower body 31. Lower body 31 also provides a conduit connection between mandrel 19 and mud saver valve 34. A guide ring 33 is connected to and disposed about the outer surface of the lower body 31. The guide ring 33 serves as a guide to center tool 46 within casing 32 as it is lowered. The outlet of lower body 31 is threadedly connected to a mud-saver valve and nozzle assembly.

25 The mud saver valve and nozzle assembly includes a mud saver valve 34, and a nozzle 35. The preferred embodiment comprises a mud saver valve 34 having threads on the outer surface of the valve inlet and internal threads on the inner surface of the valve outlet. Mud saver valve 34

5 is connected to tool 46 by threadedly connecting the body extension 36 on mud saver valve 34 to the inlet of the outlet of the lower body 31. In so doing, the body extension and a portion of lower body 31 define the housing and annular space for mud saver valve 34 internals. A body seal 36a comprising an O-ring is disposed within a channel formed in the outer surface of the upper end of the body extension 36 to seal against the inner surface of the lower body 31 outlet and the
10 pressurized fluid from leaking at the connection. Beginning with the mud saver valve 34 internals at the outlet portion, a choke 37 is connected to a choke extension 38 for regulating the flow of fluid from tool 46. Choke extension 38 and body extension 36 are adapted to retain a plunger spring 39 within the space defined by a portion of the inner surface of body extension 36 and the outer surface of choke extension 38. A plunger 40 having a central axial bore is connected to the
15 upper end of choke extension 40. Plunger 40 includes a centrally located protruding annular ring portion 41, which is in slidable engaging contact with the inner surface of a valve housing 42. A plunger seal 40a comprising an O-ring is disposed within a channel formed in the annular ring portion 41 to provide a leak tight seal against valve housing 42. The upper end of plunger 40 includes a plurality of apertures 40b to allow fluid to flow into the bore of plunger 40 and out of
20 choke 37. A plunger tip 40c is adapted to provide a fluid tight seal against plunger seat 43a. Plunger spring 39 biases plunger 40 thereby exerting an upward force on the choke extension 38 and therefore plunger 40 so that plunger tip 40c engages with and provides a fluid tight seal against the plunger seat 43a. Fluid pressure exerted on plunger tip 40c will cause plunger spring 39 to depress, which creates an opening allowing fluid to flow through mud saver valve 34, through nozzle 35 and into casing 32. The valve housing 42 is disposed between and is in
25 engaging contact with the plunger 40 and the lower body 31. A housing seal 42a comprising an O-ring is disposed within a channel formed in the outer surface of valve housing 42 to provide a

5 leak tight seal against lower body 31. A seat ring 43 having a central axial bore is in engaging contact with and disposed within the uppermost interior portion of lower body 31 and is in engaging contact with valve housing 43 and upper body 37. A lower body seal 31a comprising an O-ring is disposed within a channel formed in the lower body 31 to provide a leak tight seal against the seat ring 43. The outlet of a centrally located bore within seat ring 43 defines the
10 plunger seat 43a. The plunger seat 43a is adapted to sealingly receive plunger tip 40c. The seat ring 43 further includes a plurality of spring loaded check valves 44 housed within vertical cavities 43b. An aperture 43c extends from each of the cavities 43b to provide fluid communication between the seal ring bore and cavities 43b. When the pressure below the seat ring 43 exceeds the pressure above seat ring 43, fluid will depressure through the check valves 44 and apertures
15 45 until an equilibrium pressure above and below the seat ring 43 is achieved. The check valves 44 therefore function as safety relief valves to ensure that high pressure fluid is not trapped below the tool, which could result in tool 46 being expelled uncontrollably from casing 32 as it is removed, or in an uncontrolled pressurized flow of fluid from casing 32 when the tool is removed. It will be obvious to one skilled in the art that the uncontrolled depressurization of fluid could
20 result in significant downtime due to loss of fluid, damage to equipment, and injury to personnel.

Mud saver valve 34 also functions as a check valve to actuate open when the fluid pressure reaches a set point pressure of about 300 psig, for example. As the fluid pressure increases above 300 psig, plunger 40 is depressed against spring 39 which unseats plunger 40 from plunger seat 43a, which allows fluid to flow through tool 46 and into casing 32. When fluid pressure falls
25 below about 300 psig plunger spring 39 biases plunger 40 upward causing plunger tip 40c to seat against seat ring 43. Thus, mud saver valve 34 retains fluid that would otherwise be drained and wasted from tool 46. The nozzle 35 is connected to the outlet of the mud saver valve 34. Nozzle

5 35 is generally conical to facilitate insertion into the casing, and includes an aperture 35a, all of which allow fluid to escape from tool 46 in a substantially laminar flow regime. Several mud saver valve 34 and nozzle 35 configurations are contemplated by the present invention. For example, a hose can be connected between mud saver valve 34 and nozzle 35, or a hose may be connected between lower body 31 and mud saver valve 34.

10 To begin the fluid filling process, fill-up and circulating tool 46 is lowered over casing 32 to be filled. Only the portion of tool 46 below packer cup 29 is inserted into casing 32. Sealing device 29 remains above and outside of casing 32 during the fill-up process. Fill-up of fluid is accomplished by simply activating the pump 8 to fill and then deactivating the pump 8 on completion. As the fluid pressure increases within tool 46, mud saver valve plunger 40 is unseated from plunger seat 43a and fluid is allowed to flow through fill-up and circulating tool 46 and into casing 32 to be filled.

15 Figure 4 shows the preferred embodiment of fill-up and circulating tool 46 in the rotary type configuration. Figure 4 shows a bayonet adapter 17 connected to the first spacer 21 in place of the top sub 20 on the top sub assembly. If the top sub assembly is not needed, the bayonet adapter 17 may be connected directly to mandrel 19. The bayonet adapter 17 includes a fluid hose connection 17b, adapted to connect to the fluid hose 4, and a cylindrical post 17c extending from the top of the bayonet adapter 17. The outside diameter of the post 17c is slightly smaller than the inside diameter of the lock block so that post 17c may be inserted within the bore of the lock block 18. The outer surface of the upper end of post 17 includes channel for receiving a spring pin, which allows fill-up and circulation tool 46 to be suspended in the rotary rig configuration.

20 Figure 4 also shows fill-up and circulating tool 46 in the fluid circulation mode. Fill-up and circulating tool 46, in the rotary rig configuration, is shown lowered into casing 32 such that

5 sealing element 29 is in sealing engaging contact with the inside diameter of casing 32. Flow of fluid from pump 8 will cause the fluid pressure to build up inside of casing 32 until the hydrostatic pressure is overcome thereby resulting in the desired circulation of fluid from inside casing 32 into the wellbore 12. Packer cup 29 automatically engages against the inside diameter of casing 32 as it is lowered therein. Therefore, when circulating fluid is desired (e.g. when the casing is stuck in the wellbore 12), further downward force is exerted on tool 46 by lowering the assembly from traveling block 1. This causes spring 25 disposed about the exterior of mandrel 19 to become compressed between top collar 24 and flange portion 26a (Fig. 3) on the sliding sleeve 26. The downward force causes mandrel 19 to move vertically downward with respect to sliding sleeve 26 thereby exposing the lower end of mandrel 19 and apertures 19c formed therethrough. Pressurized fluid from the fluid pump 8 may now follow the flow path 19a through tool 46 as well as through the apertures 19c into the casing 32. As casing string 32 is filled, the fluid pressure inside of the casing increases, which further engages packer cup 29 against the inside surface of casing 32. When circulating is no longer necessary, pump 8 is simply stopped. This results in plunger 40 within mud saver valve 34 re-seating against plunger seat 43a, which stops the flow of fluid through nozzle 35. Tool 46 is then withdrawn from casing 32 by raising the assembly suspended from traveling block 1 so that the next joint of casing 32 can be picked up or to prepare tool 46 for cementing operations.

Figure 5 illustrates fill-up and circulating tool 46 in the cementing configuration. While Figure 5 shows the preferred embodiment of fill-up and circulating tool 46 as shown in Figures 3, 4 and 7 - 9, the present invention contemplates and includes fill-up and circulating tools of other embodiments. Thus, the following discussion addresses wherein fill-up and circulating tool 46 is referenced for illustrative purposes. Further, this configuration may be utilized in either the top

5 drive rig or conventional rotary rig operations. Any fill-up and circulating tool capable of insertion into casing may be quickly and easily switched from a drilling fluid filling and circulating mode of operation to the cementing configuration as shown in Figure 5 by combining the selected fill-up and circulating tool with cementing head assembly 47 and wiper plug assembly 57 of the present invention. The fill-up and circulating tool, in the cementing configuration, is connected to and
10 therefore extends the flow path from a cementing head assembly 47 to a wiper plug assembly 57. Using fill-up and circulating tool 46 as more fully described above, the cementing configuration comprises a cementing head assembly 47 connected to first spacer 21 of the top sub assembly, and a cement wiper plug assembly 57 in place of mud saver valve 34 and nozzle 35. Since the present invention contemplates and includes fill-up and circulating tools of various other embodiments,
15 other means of attachment to a top drive or conventional rotary type units are contemplated as required by the particular fill-up and circulating tool used in the cementing configuration. Additionally, cementing head assembly 47 may be directly connected to fill-up and circulating tool 46.

The preferred embodiment of cement head assembly 47 includes a ball drop coupling 48,
20 a ball carrier assembly 49, and a ball port 50 connecting ball drop coupling 48 to ball carrier assembly 49 providing a passageway therebetween. Ball carrier assembly 49 includes a ball carrier mandrel 50, which houses a ball carrier 51 in slidable engagement with the interior surface of the ball carrier mandrel 50. The lower surface of the ball carrier 51 includes a slot (not shown) within which ball stops 51b and 51c are disposed. Ball carrier 51a further includes a large ball seat and
25 a small ball seat within which a large ball 52a and a small ball 52b are respectively seated. Slidably disposed between large ball seat and small ball seat within slot the ball carrier 51 is ejector 51d. Attached to an upper surface of ball carrier 51a is plunger 53 which extends through an aperture

5 in the upper end of ball carrier mandrel 51. Disposed between a lower interior surface of ball carrier mandrel 51 and a lower surface of ball carrier 51a is ball spring 54. Threadedly connected to the upper end of ball carrier mandrel 51 is a pressure housing 55. Pressure housing 55 houses an upper end of plunger 53 and a plunger spring 56. Plunger spring 56 is disposed between a top surface of plunger head 53a and an inside surface on the top of pressure housing 55. Plunger
10 spring 56 biases plunger 53 against the biasing force applied by ball spring 54 so that neutral position, designated by line 100, ball carrier 51 is in a position that prevents the release of either of the balls 52a and 52b through ball port 50 and into ball drop coupling 48. Pressure housing 55 also includes pressure ports 55a and 55b through which a pressurization fluid (either gas, e.g. air, or hydraulic fluid) is delivered into pressure housing 55. In the preferred embodiment the fluid
15 pressure is supplied by air. Thus, cement head assembly 47 may be actuated remotely to release the appropriate ball using fluid pressure. To release large ball 52a, air pressure in the range of 90-120 psi is delivered to pressure port 55a. The fluid pressure forces plunger 53 and ball carrier 51 down to a position such that the movement of ejector 51d within the ball carrier slot stops on contact with stop 51b, the contact of which results in large ball 52a being ejected through ball port
20 50 and descends into ball drop coupling 48. Pressure housing 55 may be depressurized, which allows the spring biasing forces to overcome the fluid pressure, returning ball carrier 51 to neutral position 100. To eject small ball 52b, air pressure is delivered to pressure port 55b. The fluid pressure forces plunger 53 and ball carrier 51a upward to a position such that the movement of ejector 51d within the ball carrier slot stops on contact with stop 51c the contact of which results
25 in small ball 52b being ejected through ball port 50 and descends into ball drop coupling 48. Again, pressure housing 55 may be depressurized, which allows the spring biasing forces to overcome the fluid pressure returning ball carrier 51 to neutral position 100.

5 If fill-up and circulating tool 46 (of Figure 3a or 4) is installed with cementing head assembly 47 and wiper plug assembly 57, it is preferable to keep cement from flowing through mandrel apertures 19c. If cement is allowed to flow through mandrel apertures 19c, plugging of the apertures as well as erosion may occur. To prevent this, sliding sleeve 26 must be fixed in place on fill-up and circulating tool 46 of the present invention so that mandrel apertures 19c remain covered during the cementing operation. To accomplish this a set screw 25d is disposed within each of a plurality of threaded set screw apertures 25b in the outer surface 19b of mandrel 19 near mandrel outlet . Preferably apertures 25b are located a minimal distance above spring stop 25c to fix sliding sleeve 26 in a position to cover mandrel apertures 19c during the cementing operations. Thus cement will not flow from mandrel 19 through mandrel apertures 19c. It is therefore desirable for the full flow of cement to follow flow path 19a so as to ensure proper operation of the ball dropping function, and to prevent plugging or erosion of mandrel apertures 19c. One who is skilled in the art will readily perceive other methods for preventing sliding sleeve 26 from moving upward to expose mandrel apertures 19c. For example, a tubular member may be disposed about spring 25 between top collar 24 and sliding sleeve 26 to fix sliding sleeve 26 in place.

After the casing string has been run, it must be cemented within wellbore 12. After the last casing joint has been filled with drilling fluid, a volume of water or flushing fluid is pumped through the assembly and into the casing. The assembly is then removed from the casing string to be configured for the cementing mode. The fill-up and circulating tool is then uncoupled from the top drive or rotary drive unit. The cementing head assembly 47 is coupled to the inlet of the tool. In the alternative, the cementing head assembly 47 may be pre-installed with the fill-up and circulating tool for operation in both the drilling fluid and cementing mode. The next step is to

5 connect wiper plus assembly 57 to lower body 31 on fill-up and circulating tool 46. First, mud
saver valve 34, and nozzle 35 are removed from fill-up and circulating tool 46. The wiper plug
assembly 57 is then installed. The wiper plug assembly 57 comprises a top wiper plug 58
detachably connected to a bottom wiper plug 59. The fill-up and circulating tool is now in the
cementing configuration and is then reconnected to the top drive or rotary unit. The next step is
10 to release bottom plug 59 from wiper plug assembly 47. To release bottom plug 59, the first of
two tripping balls 52a must be released from tripping ball chamber 50. To release tripping ball
52a, pin 50c is retracted, which allows ball 52a to descend from tripping ball chamber 49 and
through tool 46. The first tripping ball 52a severs the connection between two wiper plugs 58 and
59, which causes bottom wiper plug 59 to drop into casing string 32. A calculated volume of
15 cement is then pumped through the tool and assembly, which drives bottom wiper plug 59 down
casing string 32. As bottom wiper plug 59 descends the casing string, it wipes mud off the inside
diameter of the casing. The cement drives bottom wiper plug 59 to engage with the float collar
(not shown) at the bottom of casing 32. After the calculated volume of cement has been pumped,
a second tripping ball 52b is released from ball dropping pump-in tee 49. The second tripping ball
20 severs top plug 58 from wiper plug assembly 57 and descends into the casing string. Top plug 58
is driven down casing 32 by pumping drilling fluid or other suitable fluid through inlet port 48b
behind top plug 58, which also wipes the cement off the inside of casing 32. When sufficient
pressure is generated between the two wiper plugs 58 and 59, a diaphragm in bottom wiper plug
59 is ruptured, which allows the cement between wiper plugs 58 and 59 to flow from inside casing
25 32 through bottom wiper plug 59 and into the annulus between casing 32 and wellbore 12. After
top plug 58 has come to rest by engaging against bottom plug 59, the discharge pressure on pump
9 begins to increase, which indicates that casing 32 has been successfully sealed off from the

5 annulus between casing 32 and wellbore 12.

The fill-up and circulation tool of the present invention may readily be used in a tandem configuration. The tandem configuration is used when it is desired to run two different diameter casing strings, and has the advantage of eliminating the downtime required to rig up prior art circulation tools. The tandem configuration embodiment comprises the fill-up and circulation tool
 10 as described above, however, it includes a second sliding sleeve and packer cup arrangement connected above the first sliding sleeve and packer cup wherein the diameter of the second packer cup 29 is larger than first packer cup 29. This allows for both the larger and smaller diameter casing to be filled and circulated without re-tooling. This arrangement can also be used with other sealing elements such as inflatable packers, and devices that seal against the casing via and
 15 interference or friction fit with the casing.

Figure 6 is illustrative of a push plate assembly 60. During casing operations, it may be necessary to apply a downward force to push casing 32 into the wellbore. This feature allows the weight of the rig assembly to be applied to the top of the casing through push plate assembly 60. While Figure 6 shows the preferred embodiment of fill-up and circulating tool 46 as shown in
 20 Figure 3, the present invention contemplates and includes fill-up and circulating tools of other embodiments, including but not limited to those shown in the following figures. Thus, the discussion which follows whereby fill-up and circulating tool 46 referenced is for illustrative purposes. Further, this configuration may be utilized in either the top drive rig or conventional rotary rig assemblies. The push plate assembly 60 is located between top collar 24 and top sub
 25 20 on fill-up and circulating tool 46, and is installed in place of the standard connector coupling 22. The push plate assembly 60 includes a coupling 61 with a plurality of J-shaped slots 62 within outer wall 63 of coupling 61. A rotatable plate 64 is radially disposed about coupling 61 and is

5 adapted to be fixed about coupling 61 with plurality of pins 65.

To add load to the casing string, plate 64 must first be rotated until pin 65 is engaged within the horizontal portion of J-shaped slot 62. This locks plate 64 within assembly 60 so that load may then be transferred to the casing string. Spider 10 is then engaged against casing 32 to hold the string in place. Elevator 14 is then released from casing 32 above the rig floor. The top
10 drive unit 3 is then lowered by traveling block 1 until plate 64 is in contact with the top of the casing string. Elevator 14 is then attached to casing 32, and spider 10 is released. The casing 32 is now being held only by elevator 14. Further lowering of top drive unit 3, adds load (the weight of the rig) to casing string, forcing the string into wellbore 12. To disengage and release the load from the rig, spider 10 is set against casing 32 to hold the casing string. Traveling block 1 is then
15 raised about 6 inches to pick up on top drive unit 3 enough to disengage plate 64 from the top of casing 32. Plate 64 is then rotated so that pins 65 are aligned with the vertical portion of the J-shaped slot 62. Traveling block 1 is then lowered about 6 inches to push down on top drive unit 3 enough to allow elevator 14 to be released from casing string 32. The assembly can now be positioned to receive the next joint of casing 32 to be added to the string.

20 Figure 7 is a partial cross-sectional view of another embodiment of fill-up and circulating tool

46 of the present invention. Tool 46 includes a mandrel 19 having a bore 19a formed therethrough in fluid communication between a top and bottom end, the top end being adapted for connecting to a top sub assembly for connecting to a rotary or top drive as commonly known in the art and
25 as shown in previous embodiments. Cementing apparatus 47, 49 and 50 may also be connected with tool 46 of the present invention as shown in Figure 5. Tool 46 further includes a thimble 28 and a sealing element 29 connected about mandrel 19 for sealing annulus between casing 32 and

5 tool 46 when tool 46 is in the circulating or cementing mode. Tool 46 further includes a pressure relief housing 110 connected to mandrel 19 having a fluid pathway formed therethrough and in fluid connection and continuing fluid pathway 19a of tool 46. Pressure relief housing 110 forms at least one lateral aperture or port 112 which provides a fluid pathway in communication with the mandrel pathway 19a for preventing flow from pathway 19a into casing 32 while allowing fluid
10 flow from said casing 32 through aperture 112 into pathway 19a when pressure in casing 32 is greater than the pressure within tool 46 (pathway 19a). In a preferred embodiment a mud saver valve 34 and nozzle 35 are connected below pressure relief housing 110.

Figure 8 is a cross-sectional view of pressure relief housing 110. As shown, relief housing 110 is adapted for threadedly connecting to tool assembly 46, however, relief housing 110 may
15 be welded or be a unitary section of mandrel 19. Formed laterally through housing 110 is an aperture 112 for allowing fluid to flow into flow pathway 19a. A blocking mechanism 114 is in working connection with housing 110 to prevent fluid from flowing from pathway 19a through lateral aperture 112 into the casing.

Blocking mechanism 114 as shown in Figure 8 is a back seat check valve assembly having
20 a plug and seat 116 forming a pathway therethrough, a ball 118, and a spring 120. Housing section 110 forms a lip 122 adjacent the inner opening of aperture 112. Disposed inside of aperture 112 and against lip 122 is spring 120 for biasing ball 118 away from pathway 19a and against plug and seat 116. As shown in this embodiment, plug and seat 116 is threadedly connected within aperture 112 for easy removal in order to replace ball 118 and spring 120 when
25 needed. Although plug and seat 116 is shown threadedly connected to housing section 110 other modes of connecting to may be utilized such as set screws. It is also contemplated that ball 118, spring 120, and plug and seat 116 be constructed as a single assembly.

5 With reference to Figures 1-8, when the well is in a static condition and pressure inside of casing 32 is substantially equal to or less than the pressure within tool within pathway 19a, ball 118 is seated against plug and seat 118 preventing fluid flow from inside the casing through port 112 back into housing 110. When pressure inside casing 32 is greater than the pressure in pathway 19a, ball 118 is unseated from plug and seat 116, allowing fluid to enter pathway 19a through port 112 thereby relieving pressure within casing 32. For example, when tool 46 is in the circulating mode, sealing element 29 is engagingly disposed within casing 32. Fluid is pumped through tool 46 and ball 118 is seated against plug and seat 116 preventing fluid flow through port 112. When pump 8 or 9 is shut down fluid is allowed to flow from casing 32 through port 112 into pathway 19a and past sealing element 29. In this manner, pressure is equalized across sealing element 29 allowing tool 46a to be removed from casing 32.

10 Figure 9 is a partial, cross-sectional view of another embodiment of pressure relief housing 110. As blocking mechanism 114, includes an elastomer member 124 for preventing fluid from pathway 19a through port 112 into the casing when pressure is greater in pathway 19a than in the casing. As shown, elastomer member 124 is an inverted packer cup disposed within pathway 19a and across port 112. Member 124 is held in place by a locking ring 126 connected to the interior of housing 110. Many versions of this embodiment are anticipated such as, inversion of a packer cup such as the one shown, an elastomeric flapper attached across port 12, use of other deformable material which is biased across port 112 when pressure in pathway 19a is greater than the pressure in casing 32.

20 In addition it is anticipated that housing 112 as shown in Figures 7-9 may include a port 112 but not have a blocking mechanism. In this embodiment, fluid may be pumped through tool 46 and through port 112. When pumps 8 or 9 are shut off, fluid and pressure is allowed to bypass

5 valve 34 and enter tool 46 through port 112 and relieve the pressure below sealing element 29.

Those who are skilled in the art will readily perceive how to modify the present invention still further. For example, many connections illustrated have been shown as threaded, however, it should be understood that any coupling means (threads, welding, O-ring, etc.) Which provides a leak tight connection may be used without varying from the subject matter of the invention disclosed herein. In addition, the subject matter of the present invention would not be considered limited to a particular material of construction. Therefore, many materials of construction are contemplated by the present invention including but not limited to metals, fiberglass, plastics as well as combinations and variations thereof. As many possible embodiments may be made of the present invention without departing from the scope thereof, it is to be understood that all matter herein set forth or shown in the accompanying drawings is to be interpreted as illustrative and not in a limiting sense. Accordingly, the foregoing description should also be regarded as only illustrative of the invention, whose full scope is measured by the following claims.

5 **WHAT IS CLAIMED IS**

1. A fill-up and circulating tool for inserting into the upper end of a casing string to fill fluid into and to circulate fluid from inside the casing into a wellbore for use on top drive and rotary type drilling rigs, the fill-up and circulating tool comprising:

 a mandrel having a central axial bore defining a flow path therethrough;

10 a sleeve in engagement with mandrel for relieving pressure through said mandrel;

 an adjustable top sub assembly connected to said mandrel for variably extending the length thereof; and

 a sealing element disposed about said mandrel for sealing engagement with the inside diameter of the casing.

15 2. The fill-up and circulating tool of claim 1, wherein:

 engagement of said sealing element with the inside of said casing generally fixes said mandrel in position with respect to said casing.

20 3. The fill-up and circulating tool of claim 2, further comprising:

 a spring disposed about the outer surface of said mandrel and retained between said top sub assembly and said sleeve for biasing said sleeve to cover at least one aperture formed through said mandrel;

 a spring stop disposed between said spring and said mandrel to limit the compression of said spring; and

25 a lower body connected to said mandrel for limiting the travel of said sleeve.

5 4. The fill-up and circulating tool of claim 3, further comprising:
a cementing head assembly connected atop said fill-up and circulating tool; and
a wiper plug assembly having at least one detachable plug in functional connection with
said fill-up and circulating tool for wiping the inside diameter of said casing.

10 5. The fill-up and circulating tool of claim 4, wherein:
said cementing head includes a ball drop coupling, a ball carrier assembly, and a ball port
connecting said ball drop coupling to said ball carrier assembly.

15 6. The fill-up and circulating tool of claim 5, wherein:
said ball carrier assembly carries one or more operationally balls disposed therein.

20 7. The fill-up and circulating tool of claim 4, wherein:
said mandrel includes at least one screw aperture and a set screw disposable therein, said
set screw for engaging with an upper surface of said spring stop for fixing said
sleeve in position to cover at least one said mandrel aperture.

25 8. The fill-up and circulating tool of claim 5, wherein:
said mandrel includes at least one screw aperture and a set screw disposable therein, said
set screw for engaging with an upper surface of said spring stop for fixing said
sleeve in position to cover at least one said mandrel aperture.

9. The fill-up and circulating tool of claim 6, wherein:

5 said mandrel includes at least one screw aperture and a set screw disposable therein, said
 set screw for engaging with an upper surface of said spring stop for fixing said
 sleeve in position to cover at least one said mandrel aperture.

10 10. A fill-up and circulating tool for inserting into the upper end of a casing string to
 fill fluid into and to circulate fluid from inside the casing into a wellbore for use on
 a top drive and rotary type drilling rigs, the tool comprising:

 a mandrel having a central axial bore defining a flow path therethrough:

 a pressure relief device in fluid communication with said mandrel for relieving pressure
 therethrough;

15 a top sub assembly connected to the mandrel for variably extending the length thereof; and
 a sealing element for sealing engagement with the inside diameter of said casing.

20 11. The fill-up and circulating tool of Claim 10, wherein:
 engagement of said sealing element with the inside diameter of said casing generally fixes
 said mandrel in position with respect to said casing.

 12. The fill-up and circulating tool of Claim 10, further comprising:
 a valve for controlling the flow of fluid through the mandrel.

25 13. The fill-up and circulating tool of claim 11, further comprising:
 a cementing head assembly connected atop said fill-up and circulating tool; and
 a wiper plug assembly having at least one detachable plug in functional connection with

5 said fill-up and circulating tool for wiping the inside diameter of said casing.

14. The fill-up and circulating tool of claim 13, wherein:

 said cementing head includes a ball drop coupling, a ball carrier assembly, and a ball port
 connecting said ball drop coupling to said ball carrier assembly.

10

15. The fill-up and circulating tool of claim 14, wherein:

 said ball carrier assembly carries one or more operationally balls disposed therein.

16. A fill-up and circulating tool insertable into the upper end of a casing string to fill
 the casing string with fluid and to circulate fluid from inside the casing string, the
 tool comprising:

 a mandrel having a top end and a bottom end forming an axial fluid flow pathway
 therethrough; said top end adapted for connecting to the surface drilling apparatus;

 a sealing element connected about said mandrel, said sealing element adapted for engaging
 the interior of said casing when inserted therein preventing fluid flow between said
 sealing element and said casing; and

 a pressure relief apparatus in connection with said mandrel, said pressure relief apparatus
 providing a fluid pathway therethrough in fluid communication with said mandrel
 fluid pathway for depressuring said mandrel and said casing.

25

17. The fill-up and circulating tool of Claim 16, wherein:

 said pressure relief apparatus forms at least one lateral aperture for relieving back pressure

5 from said casing when desired.

18. The fill-up and circulating tool of Claim 17, further comprising:
a blocking member preventing fluid flow through said pressure release apparatus when
pressure within said mandrel pathway is greater than pressure in said casing string,
10 and allowing backflow when pressure in said casing is greater then in said pathway.

19. The fill-up and circulating tool of Claim 18, wherein:
said blocking member includes a ball, said ball biased and seated from the interior of said
pressure relief apparatus against said lateral aperture.

20. The fill-up and circulating tool of Claim 18, wherein:
said blocking member is a deflectable member disposed within said pressure relief housing
adjacent said lateral aperture.

21. The fill-up and circulating tool of claim 16, further comprising:
a cementing head assembly connected atop said fill-up and circulating tool; and
a wiper plug assembly having at least one detachable plug in functional connection with
said fill-up and circulating tool for wiping the inside diameter of said casing.

22. The fill-up and circulating tool of claim 21, wherein:
said cementing assembly carries one or more operationally balls disposed therein.


- 5 23. The fill-up and circulating tool of claim 18, further comprising:
a cementing head assembly connected atop said fill-up and circulating tool; and
a wiper plug assembly having at least one detachable plug in functional connection with
said fill-up and circulating tool for wiping the inside diameter of said casing.
- 10 24. The fill-up and circulating tool of claim 18, wherein:
said cementing assembly carries one or more operationally balls disposed therein.
- 15 25. The fill-up and circulating tool of claim 19, further comprising:
a cementing head assembly connected atop said fill-up and circulating tool; and
a wiper plug assembly having at least one detachable plug in functional connection with
said fill-up and circulating tool for wiping the inside diameter of said casing.
- 20 26. The fill-up and circulating tool of claim 25, wherein:
said cementing assembly carries one or more operationally balls disposed therein.
- 25 27. The fill-up and circulating tool of claim 20, further comprising:
a cementing head assembly connected atop said fill-up and circulating tool; and
a wiper plug assembly having at least one detachable plug in functional connection with
said fill-up and circulating tool for wiping the inside diameter of said casing.
28. The fill-up and circulating tool of claim 27, wherein:
said cementing assembly carries one or more operationally balls disposed therein.


- 5 30. A fill-up and circulating tool insertable into the upper end of a casing string to fill
the casing string with fluid and to circulate fluid from inside the casing string, the
tool comprising:
- a mandrel having a top end and a bottom end forming an axial fluid flow pathway
 therethrough; said top end adapted for connecting to the surface drilling apparatus;
- 10 a sealing element connected about said mandrel, said sealing element adapted for engaging
the interior of said casing when inserted therein preventing fluid flow between said
sealing element and said casing;
- a pressure relief apparatus in connection with said mandrel, said pressure relief apparatus
 providing a fluid pathway therethrough in fluid communication with said mandrel
 fluid pathway for depressuring said mandrel and said casing; and
- 15 a one-way valve member in fluid communication with said mandrel fluid pathway allowing
fluid to pass into said casing and substantially preventing back flow therethrough.

5

ABSTRACT

A multi-functional apparatus and method for drilling fluid and cementing operations to set casing in a wellbore for use on either top drive or rotary type rigs. The apparatus and method includes a fill-up and circulating tool, a cementing head assembly, and a wiper plug assembly. The fill-up and circulating tool comprises a mandrel with a sealing element disposed about the outside diameter of the mandrel. The cementing head and wiper plug assemblies are useable on any fill-up and circulating tool capable of being inserted into a casing. To fill the casing, the assembly is lowered from the rig such that a portion of the fill-up tools inserted into the casing, the pumps are then actuated to flow fluid into the casing. To circulate fluid, the tool is lowered further such that the sealing element sealingly engages the inside diameter of the casing to allow fluid to flow through the casing, into the wellbore, and back to the fluid pumps. To cement the casing, the cement pump and hose assembly is connected to the cementing head to allow cement to be pumped through the fill-up and circulating tool and into the casing string. A cement plug assembly comprising a plurality of wiper plugs is connected to the outlet of the fill-up and circulating tool. The wiper plugs are then released at a predetermined time during the cementing process to provide a positive seal at the bottom of the casing string.

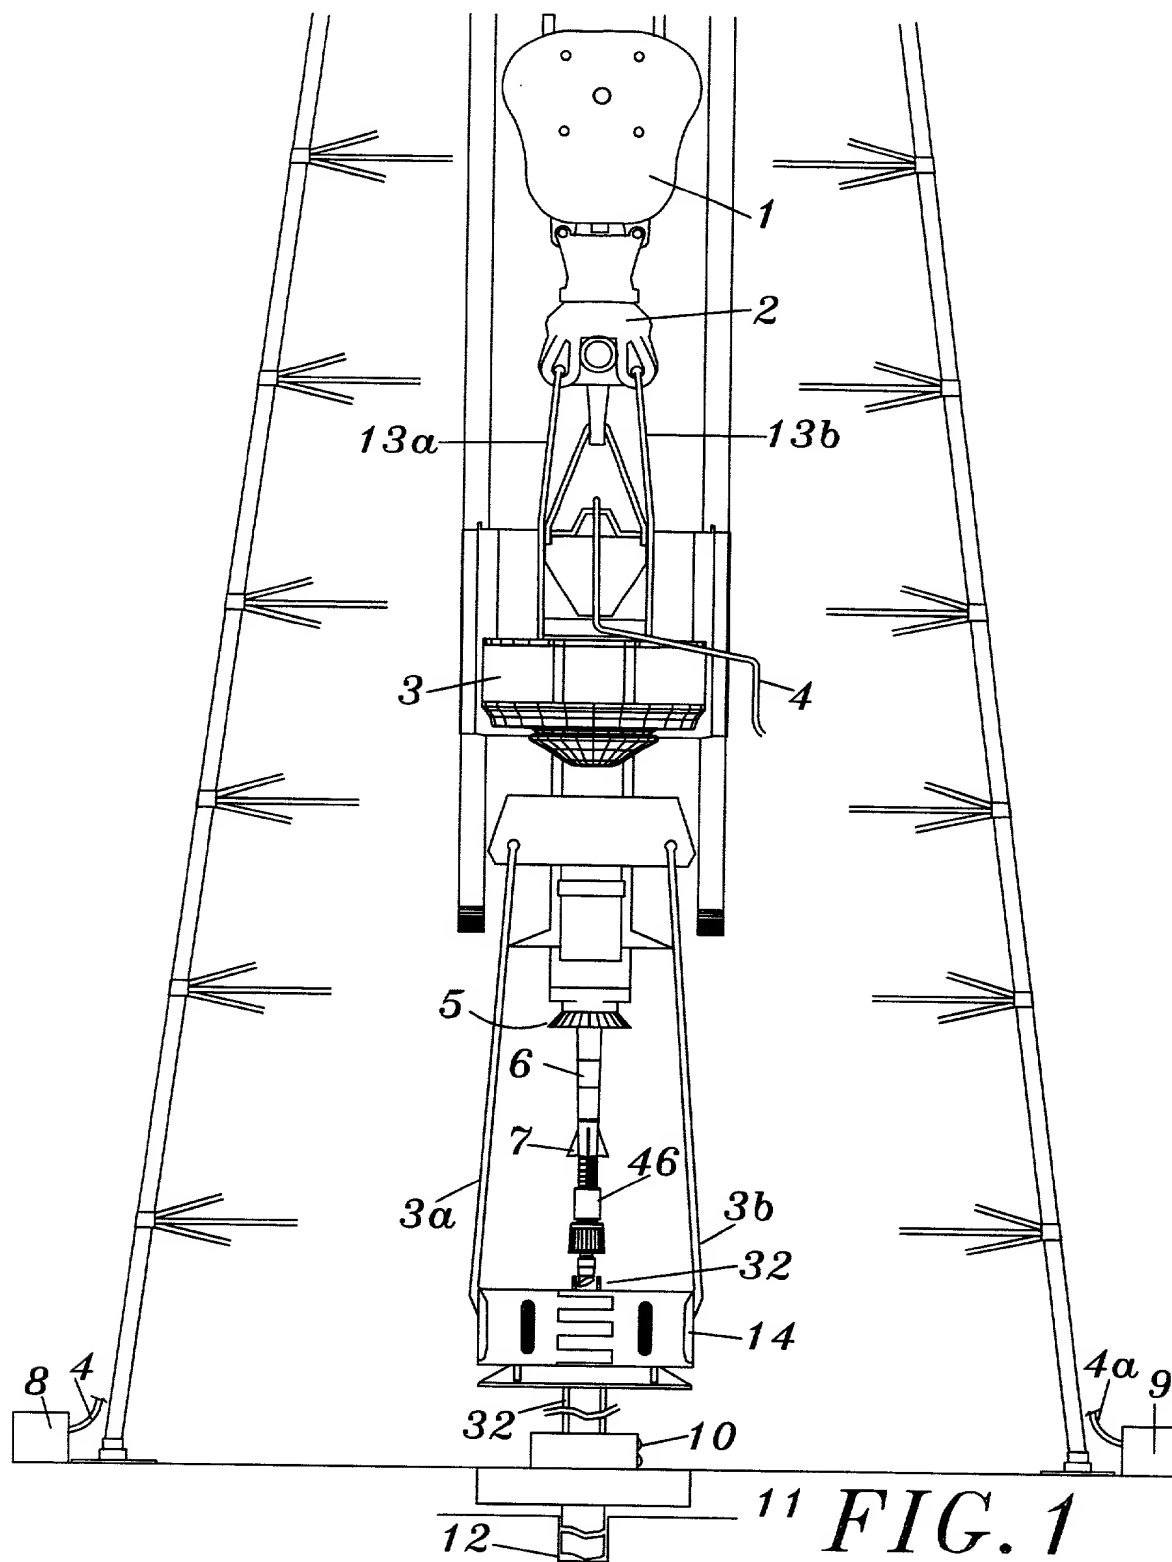

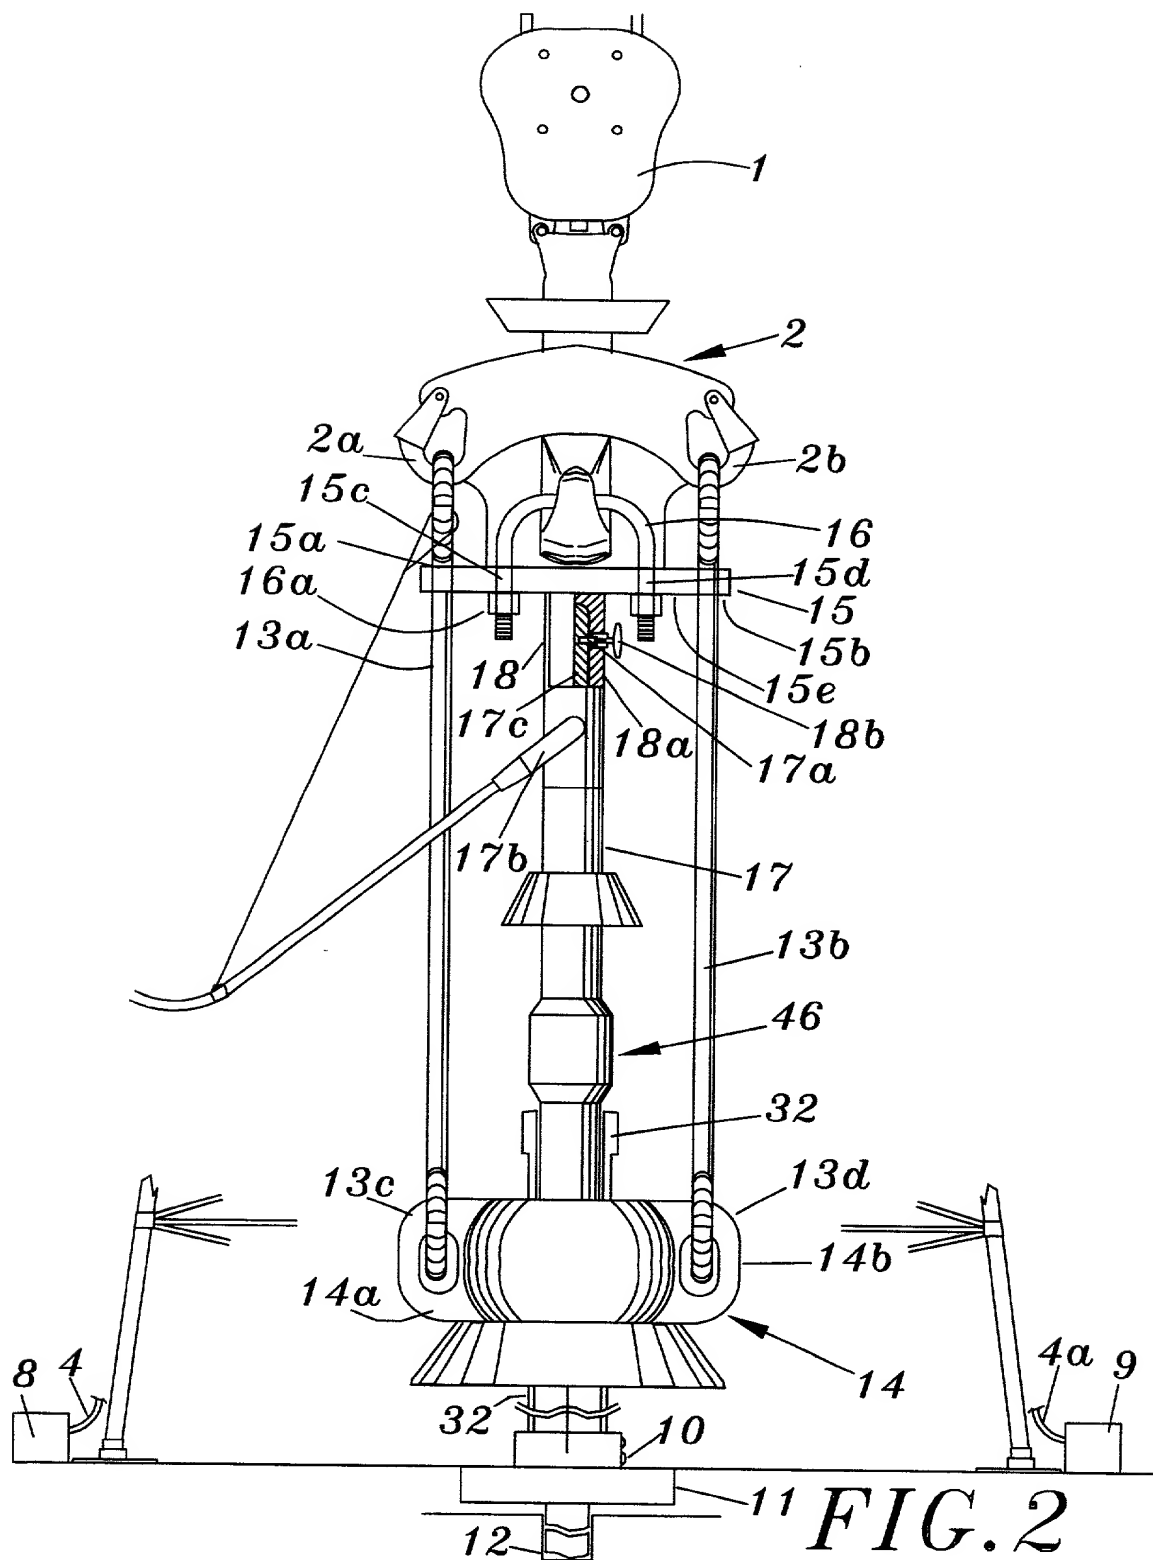

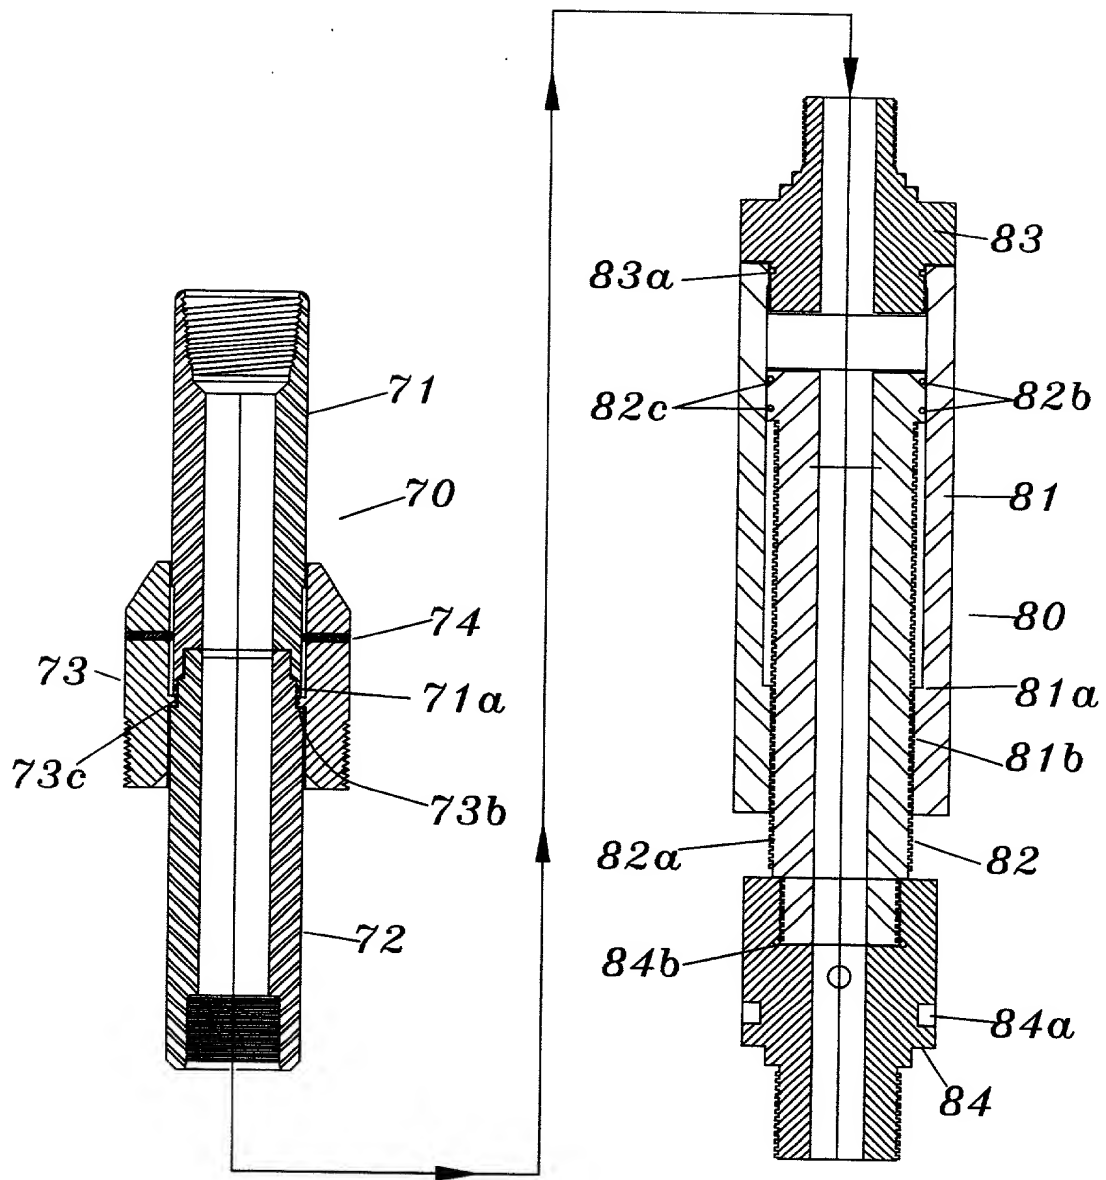


FIG 3

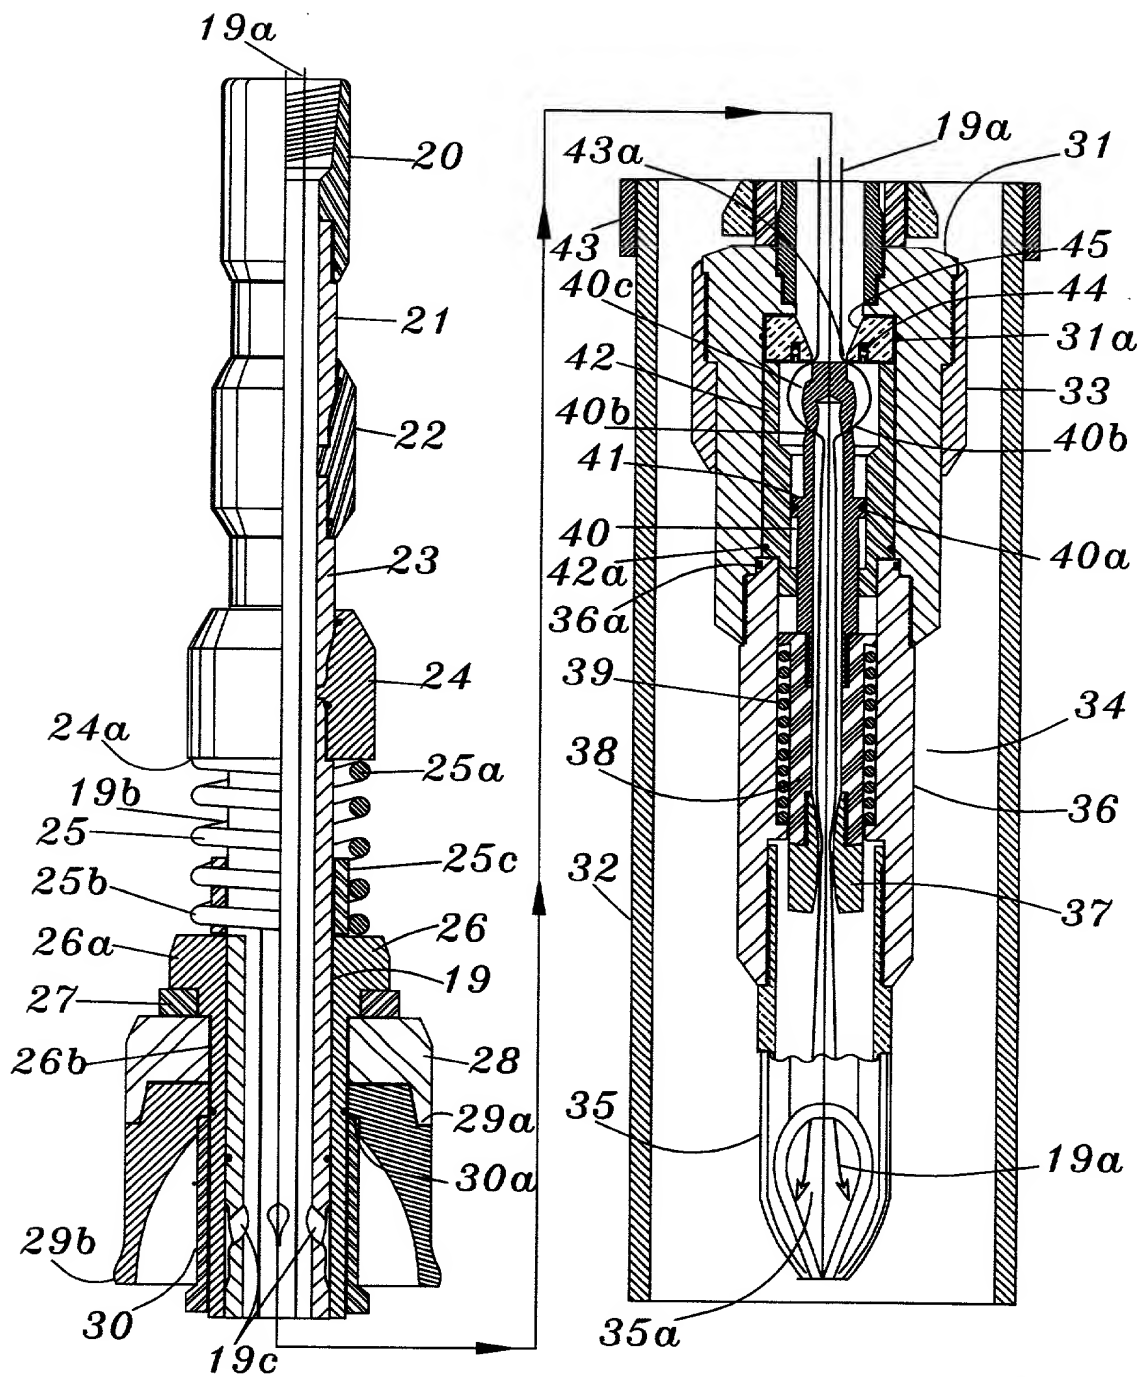


FIG. 3A

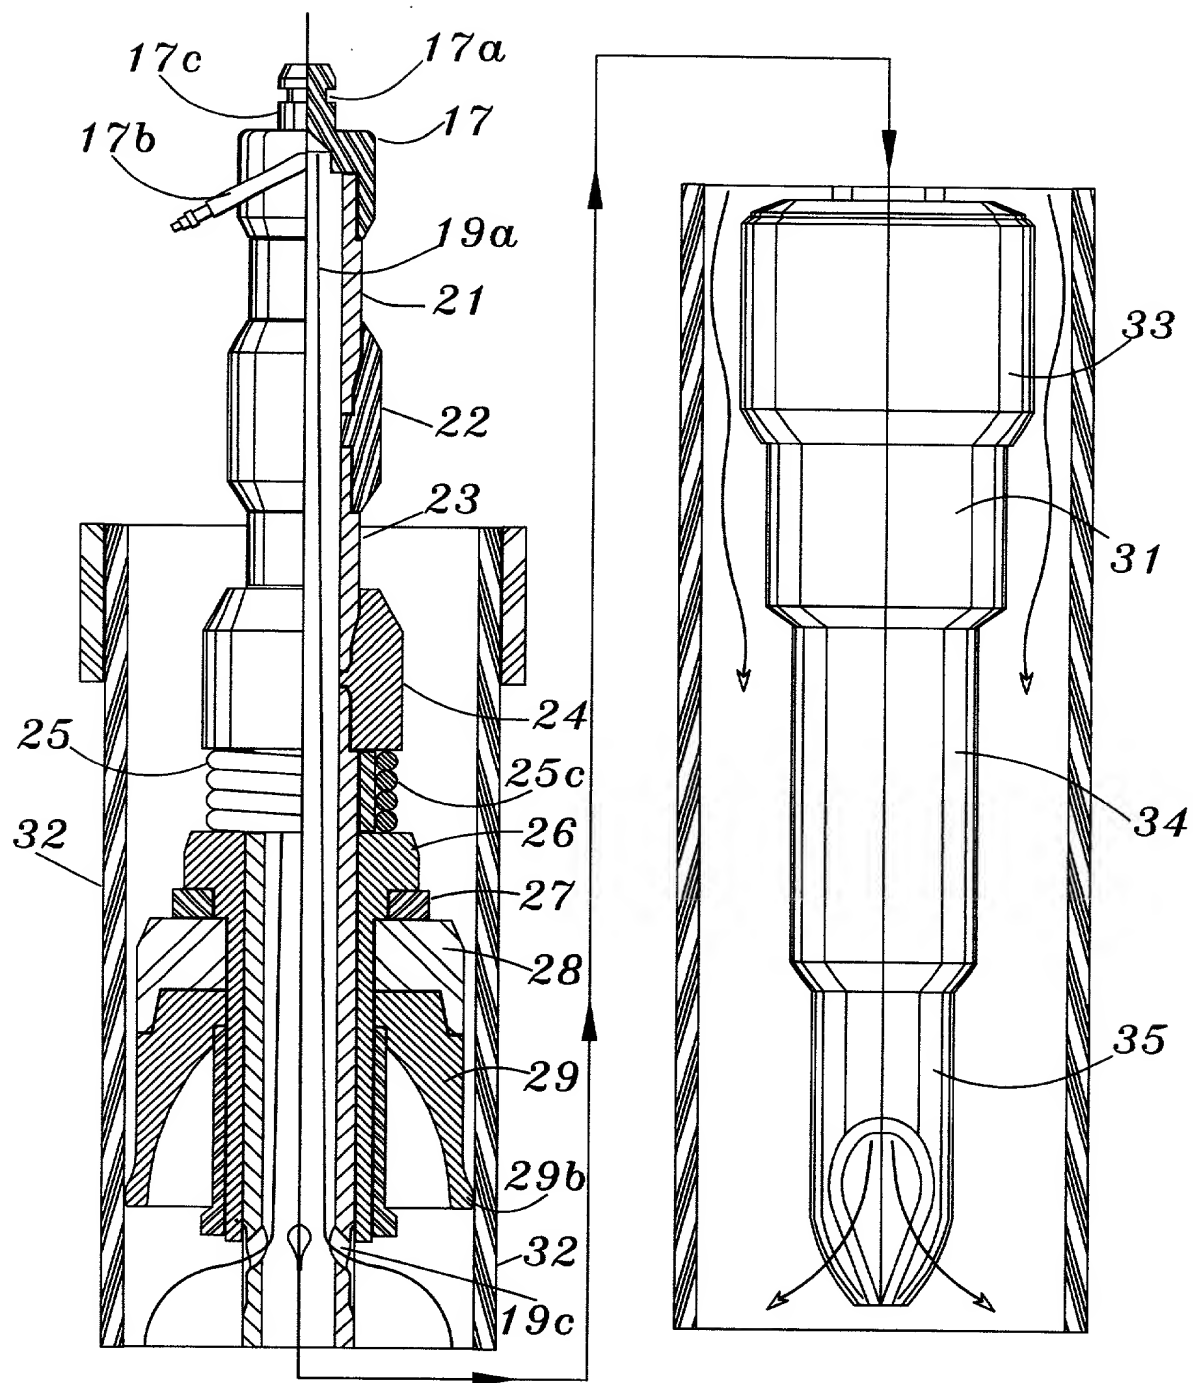


FIG. 4

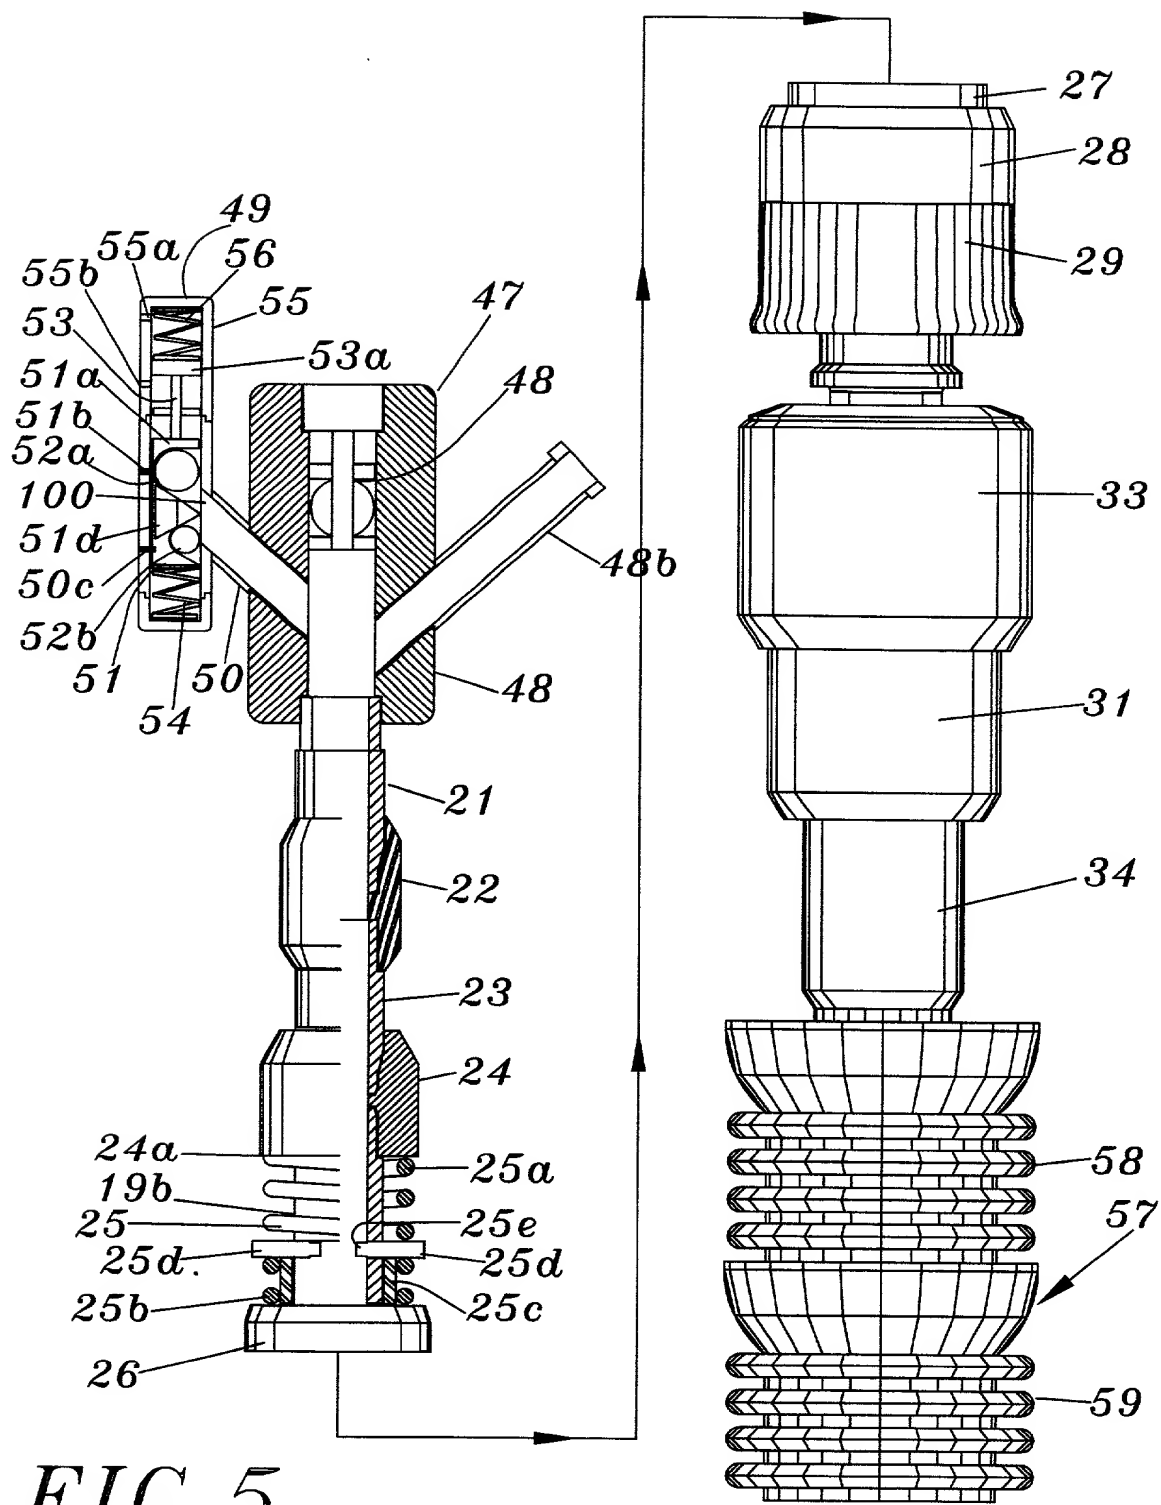


FIG. 5

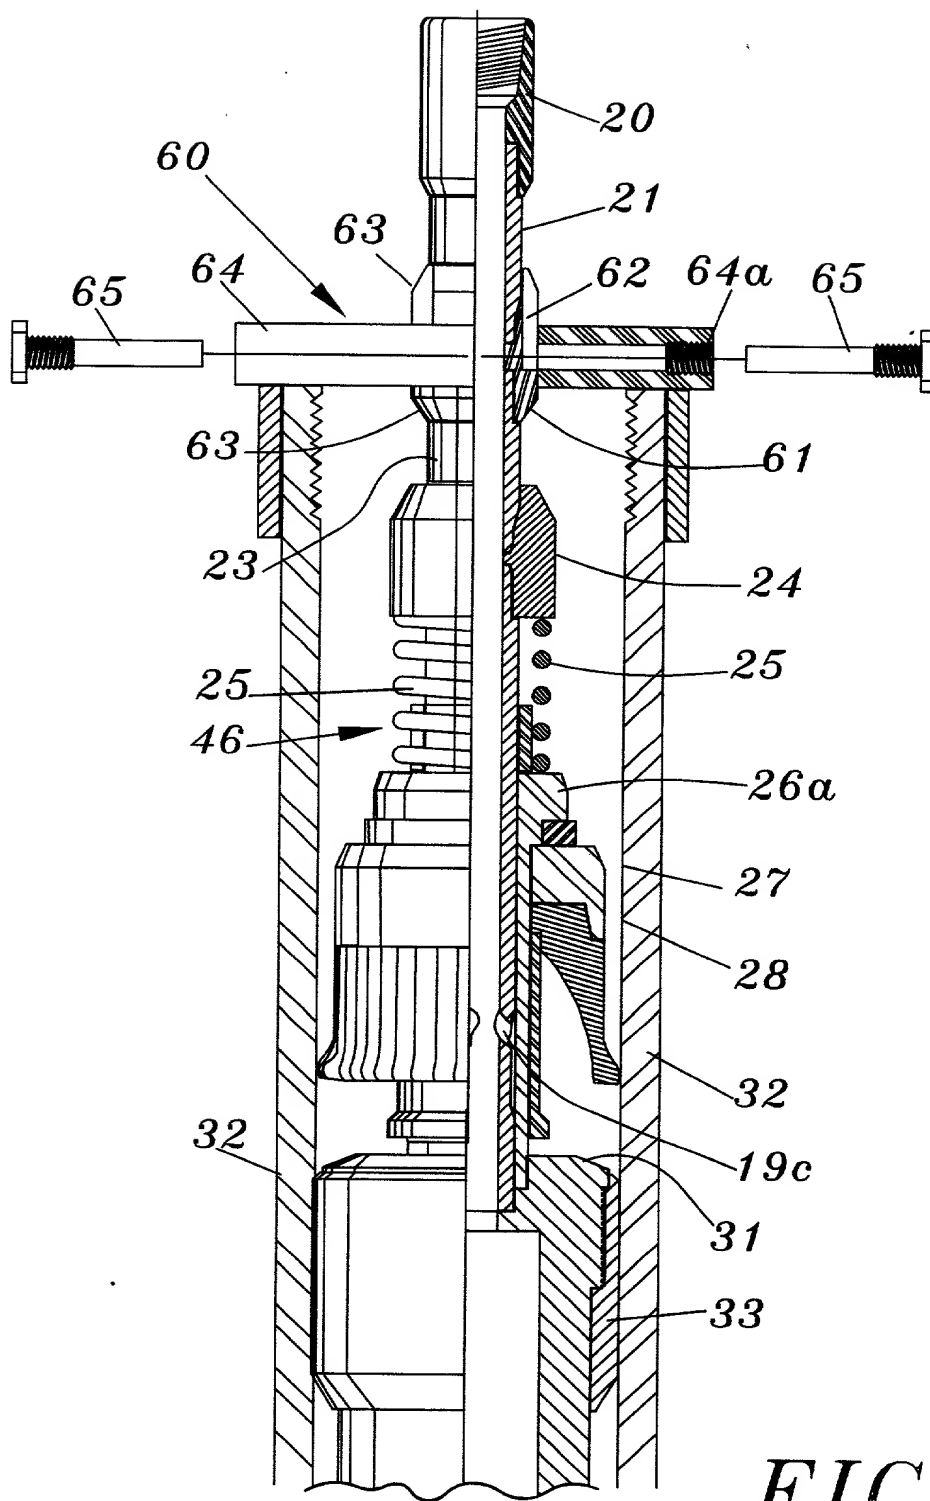


FIG. 6

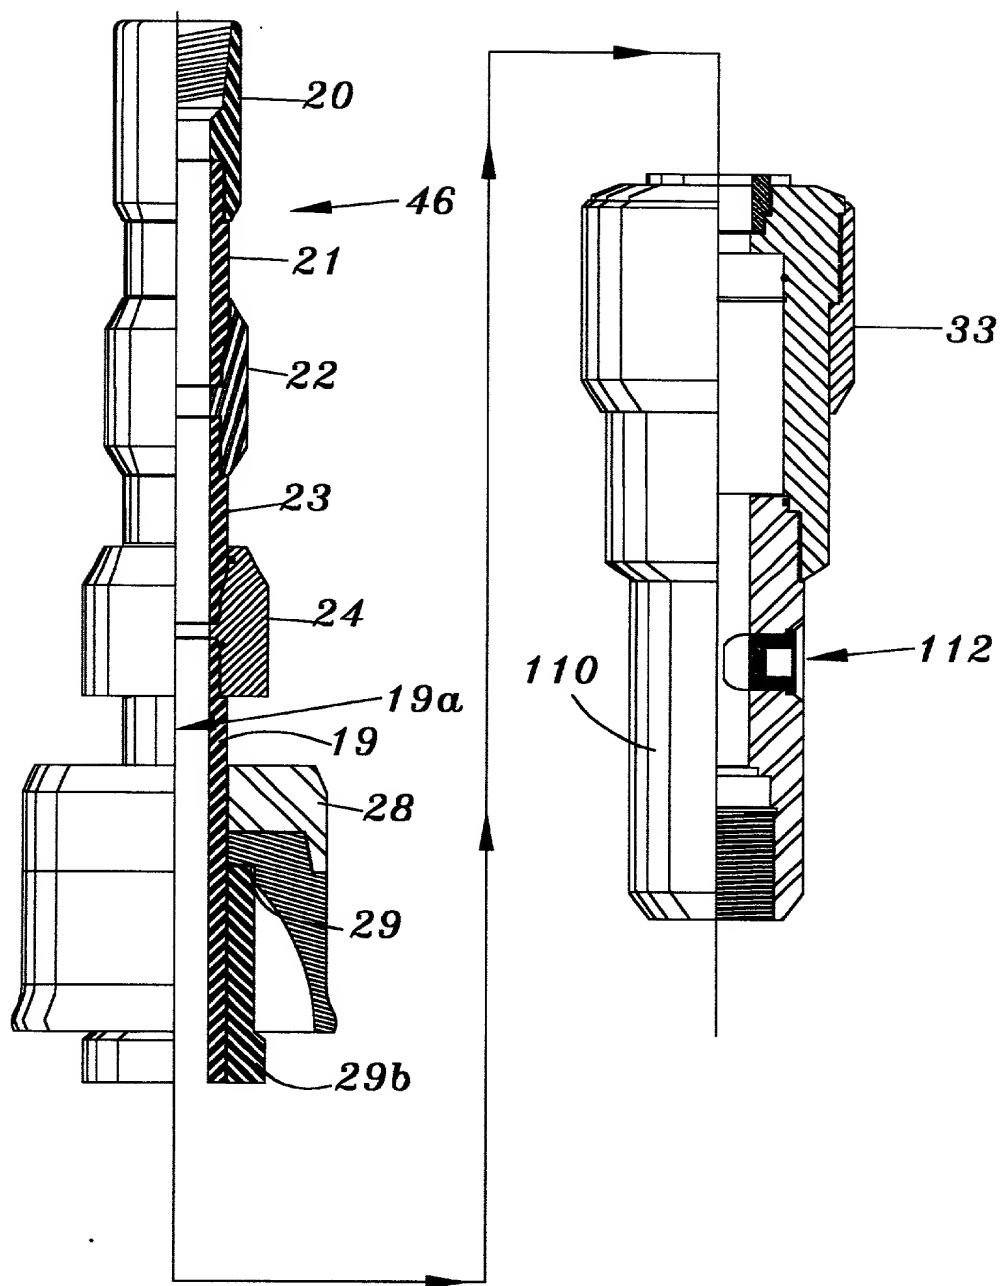


FIG. 7

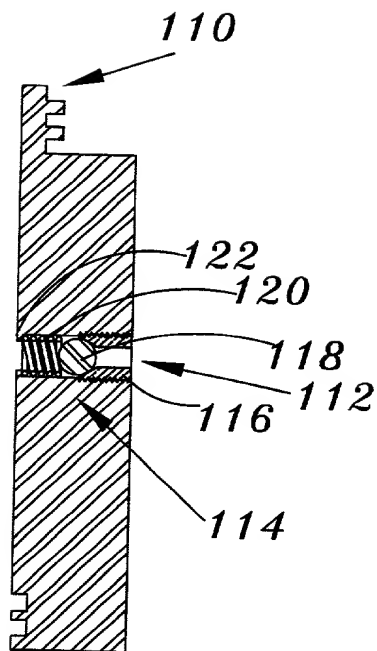


FIG. 8

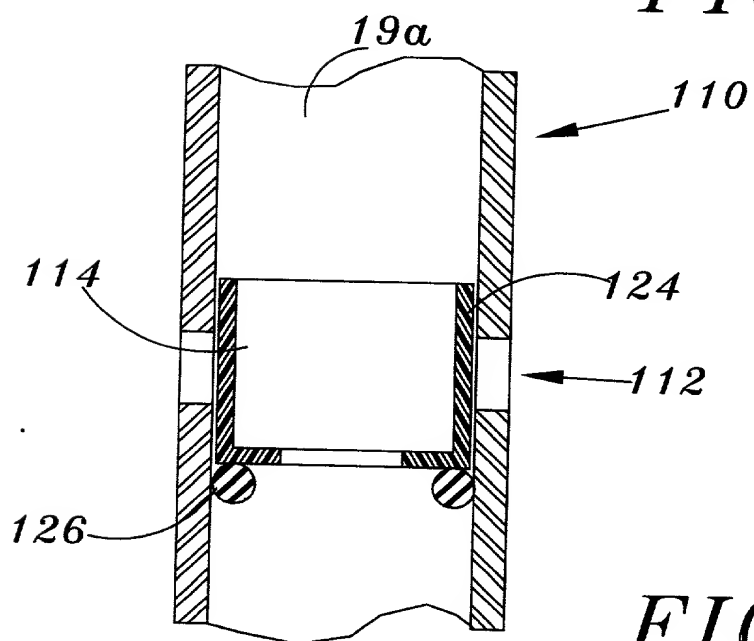


FIG. 9

Docket No.

FKI26

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**IMPROVED METHOD AND MULTI-PURPOSE APPARATUS FOR DISPENSING AND CIRCULATING
FLUID IN WELLBORE CASING**

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

08/726,112	4 October 1996	5,735,348 (Patented)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
08/850,496	2 May 1997	Pending
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Guy E. Matthews	Reg. No. 24,173
Charles J. Rogers	Reg. No. 38,286
Dwayne L. Mason	Reg. No. 38,959
Robert C. Shaddox	Reg. No. 34,011
Henry L. Ehrlich	Reg. No. 39,663
Matthew E. Burr	Reg. No. 37,591
Gary R. Maze	Reg. No. 42,851

**021897**


PATENT AND TRADEMARK OFFICE


Send Correspondence to: **Henry L. Ehrlich**
Matthews, Joseph, Shaddox & Mason, P.L.L.C.
P.O. Box 572957
Houston, Texas 77257-2957


Direct Telephone Calls to: *(name and telephone number)*
(713) 781-9595

Full name of sole or first inventor Donald E. Mosing	
Sole or first inventor's signature <i>Donald E. Mosing</i>	Date <i>11/30/98</i>
Residence 131 Wembley Dr., Lafayette, Louisiana 70503	
Citizenship US	
Post Office Address	

Full name of second inventor, if any Samuel P. Hawkins	
Second inventor's signature <i>Samuel P. Hawkins</i>	Date <i>11/20/98</i>
Residence 912 Hood Street, Mineral Wells, Texas 76067	
Citizenship US	
Post Office Address	

Full name of third inventor, if any David L. Sipos	
Third inventor's signature 	Date
Residence 701-B Carriage Light Loop, Youngsville, Louisiana 70592	
Citizenship US	
Post Office Address	

Full name of fourth inventor, if any Keith T. Lutgring	
Fourth inventor's signature 	Date
Residence 1024 Marilyn Drive, Lafayette, Louisiana 70503	
Citizenship US	
Post Office Address	

Full name of fifth inventor, if any Burney J. Latiolais, Jr.	
Fifth inventor's signature 	Date
Residence 203 Saddlewood Corner, Lafayette, Louisiana 70508	
Citizenship US	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	